

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 984 275 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

08.03.2000 Bulletin 2000/10

(51) Int. Cl.⁷: G01N 27/407, F02D 41/14

(21) Application number: 99116051.6

(22) Date of filing: 16.08.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 04.09.1998 JP 25128598

(71) Applicant: Denso Corporation

Kariya-city, Aichi-pref., 448-0029 (JP)

(72) Inventors:

• Suzuki, Toshiyuki

Kariya-shi, Aichi-pref. 448-0029 (JP)

• Kurokawa, Eiichi

Kariya-shi, Aichi-pref. 448-0029 (JP)

• Hada, Satoshi

Kariya-shi, Aichi-pref. 448-0029 (JP)

• Kawase, Tomoo

Kariya-shi, Aichi-pref. 448-0029 (JP)

(74) Representative:

Pellmann, Hans-Bernd, Dipl.-Ing. et al

Patentanwaltsbüro

Tiedtke-Bühling-Kinne & Partner

Bavariaring 4


80336 München (DE)

(54) Gas concentration sensing apparatus capable of suppressing sensor voltage oscillation

(57) A limit-current type A/F sensor (10) produces element current responsive to oxygen concentration in the exhaust gas when a voltage is applied to its sensor element portion. An application voltage control circuit (21) comprises an operational amplifier (21a) and resistors (21b, 21c). An output of the control circuit (21) is applied to one terminal of the A/F sensor (10) via a driver circuit (22). The other terminal of the A/F sensor (10) is connected to an output terminal of an operational amplifier (23) via a current-detecting resistor (24). The

element current value, detected by the current-detecting resistor (24), is returned to the application voltage control circuit (21) via a buffer (28). In the application voltage control circuit (21), adjustment of the gain is performed in such a manner that the inclination of the application voltage line on the V-I coordinate becomes larger than the inclination equivalent to the A.C. impedance of the sensor element in the sensor activated condition.

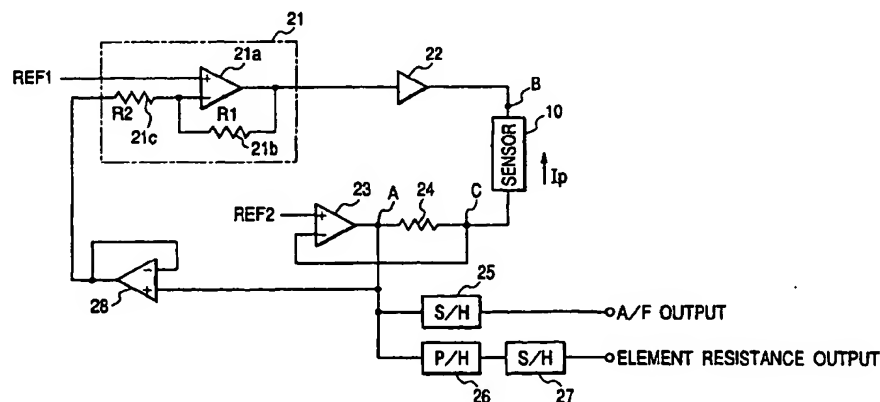FIG. 1



EP 0 984 275 A2

Description

BACKGROUND OF THE INVENTION

5 [0001] The present invention relates to a gas concentration sensing apparatus using a gas concentration sensor which detects a concentration of a specific component of a measured gas, such as oxygen involved in an exhaust gas emitted from an automotive vehicle engine. More specifically, the present invention relates to a gas concentration sensing apparatus which is capable of adequately controlling a voltage applied to the gas concentration sensor.

10 [0002] There are conventional gas concentration sensors each comprising a solid electrolytic element for detecting a specific component of a measured gas. For example, a limit-current type air-fuel ratio sensor (referred to as A/F sensor) detects an oxygen concentration in an exhaust gas. The A/F sensor produces a current signal responsive to the oxygen concentration in the exhaust gas (i.e., air-fuel ratio), when a voltage is applied to the sensor element. The solid electrolytic element (i.e., sensor element) of the limit-current type sensor may be zirconia. The A.C. characteristics of this limit-current type sensor is stable in a high frequency region of the application voltage equal to or higher than 1 kHz. When an element resistance is detected, an application voltage has a frequency determined by considering the A.C. characteristics of the solid electrolytic element. In such detection of the element resistance utilizing the sensor AC characteristics, an A.C. impedance of the element is obtained from a variation amount of the application voltage and a variation amount of a corresponding current.

20 A.C. impedance = voltage variation / current variation

[0003] To accurately detect the air-fuel ratio, it is necessary to adequately control the application voltage. To realize this, the applicant has previously proposed, as one of prospective systems, an "air-fuel ratio detecting apparatus" in the published Japanese patent application No. 10-185861. According to this air-fuel ratio detecting apparatus, the voltage applied to the A/F sensor is controlled by a microcomputer. Especially, a change speed of the application voltage is variably controlled. More specifically, the change rate of the application voltage is small in a specific region corresponding to the stoichiometric A/F value and its vicinity compared with change rates in other regions. Such settings make it possible to improve sensing accuracy in the air-fuel ratio detecting operation.

30 [0004] When the microcomputer is used, the application voltage to the A/F sensor is controlled in the following manner. The microcomputer generates a digital signal representing an application voltage. This digital signal is converted into an analog signal by a D/A converter. The application voltage, thus converted into the analog signal, is applied to the A/F sensor. When the voltage applied to the A/F sensor shows stepwise changes periodically, a tailing phenomenon appears on an element current (i.e., sensor current) at each timing corresponding to each stepwise change of the application voltage as shown in Fig. 16. This tailing phenomenon is inherently derived from the A.C. characteristics of the sensor element, and significantly worsens the sensing accuracy in the air-fuel ratio detecting operation. The tailing phenomenon can be suppressed by reducing a step height in each change of the application voltage. However, to realize this, the D/A converter needs to have higher or improved resolution. The cost will be forcibly increased.

35 [0005] According to this kind of A/F sensor, its activated state and/or deteriorated state can be known by detecting an internal resistance of the solid electrolytic element (i.e., element resistance). The detection of the internal resistance of the solid electrolytic element is generally performed by interrupting the air-fuel ratio detecting operation. However, it is desirable to reduce such a dormant period. Accordingly, the D/A or A/D converter and the microcomputer must have high-speed processing capability. This also leads to cost increase.

40 [0006] As described above, the microcomputer equipped apparatus causes various inconveniences.

45 SUMMARY OF THE INVENTION

[0007] In view of the foregoing problems encountered in the prior art, the present invention has an object to provide a gas concentration sensing apparatus which is capable of effectively suppressing the oscillation of the application voltage and accurately detecting a gas concentration.

50 [0008] In order to accomplish this and other related objects, the present invention provides a first gas concentration sensing apparatus comprising a sensor element including a solid electrolytic member with electrodes provided on opposed surfaces of the solid electrolytic member, a gas concentration sensor for generating a current signal responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between the electrodes of the sensor element, and an application voltage control circuit for feedback controlling the application voltage applied to the gas concentration sensor in response to the current signal, characterized in that a resistance value obtainable from a change rate of the application voltage controlled by the application voltage control circuit in response to the current signal is set to be smaller than an A.C. impedance of the sensor element.

55 [0009] Preferably, an application voltage line is defined on a V-I coordinate for determining the voltage applied to the

gas concentration sensor from the application voltage control circuit, and an inclination of the application voltage line is larger than an inclination equivalent to the A.C. impedance of the sensor element in a sensor activated condition.

[0010] Furthermore, the present invention provides a second gas concentration sensing apparatus comprising a sensor element including a solid electrolytic member with electrodes provided on opposed surfaces of the solid electrolytic member, a gas concentration sensor for generating a current signal responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between the electrodes of the sensor element, and an application voltage control circuit for feedback controlling the voltage applied to the gas concentration sensor in response to the current signal, characterized in that a change speed of the application voltage is suppressed in a feedback loop of the application voltage control circuit.

[0011] Preferably, the change speed of the application voltage produced by the application voltage control circuit is reduced in such a manner that a resistance value obtainable by the application voltage per unit time is smaller than an A.C. impedance of the sensor element.

[0012] Preferably, a low-pass filter is provided as a delay means for reducing the change speed of the application voltage controlled by the application voltage control circuit in response to the current signal.

[0013] Preferably, an operational amplifier constituting the application voltage control circuit has a slow through rate so as to serve as a delay means for reducing the change speed of the application voltage controlled by the application voltage control circuit in response to the current signal.

[0014] Furthermore, the present invention provides a third gas concentration sensing apparatus comprising a sensor element including a solid electrolytic member with electrodes provided on opposed surfaces of the solid electrolytic member, a gas concentration sensor for generating a current signal responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between the electrodes of the sensor element, and an application voltage control circuit for feedback controlling the application voltage applied to the gas concentration sensor in response to the current signal, characterized in that an overall gain of a feedback loop including the gas concentration sensor and the application voltage control circuit is always equal to or smaller than 1.

[0015] In the above-described second and third gas concentration sensing apparatus, it is preferable that an application voltage line is defined on a V-I coordinate for determining the voltage applied to the gas concentration sensor, and an inclination of the application voltage line is equalized to an inclination equivalent to a D.C. resistance of the sensor element of the gas concentration sensor in a sensor activated condition.

[0016] In this case, the gas concentration sensing apparatus is preferably incorporated in an air-fuel ratio control system for performing a lean burn control of an internal combustion engine.

[0017] In all of the above-described first to third gas concentration sensing apparatus, it is preferable to provide a plurality of application voltage lines different in their inclinations on the V-I coordinate to selectively or continuously use the plurality of application voltage lines in accordance with the temperature of the sensor element.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description which is to be read in conjunction with the accompanying drawings, in which:

Fig. 1 is a circuit diagram showing a schematic arrangement of an air-fuel ratio sensing apparatus in accordance with a first embodiment of the present invention;

Fig. 2 is a cross-sectional view showing a detailed arrangement of a sensor element portion of an A/F sensor in the air-fuel ratio sensing apparatus shown in Fig. 1;

Fig. 3 is a graph showing V-I characteristics of the A/F sensor;

Fig. 4 is a graph showing an application voltage line on a V-I coordinate;

Fig. 5 is a graph showing application voltage lines on a V-I coordinate;

Fig. 6 is a graph showing application voltage lines on a V-I coordinate;

Fig. 7 is a graph showing an application voltage line on a V-I coordinate;

Fig. 8 is a graph showing application voltage lines on a V-I coordinate;

Fig. 9 is a circuit diagram showing a schematic arrangement of an air-fuel ratio sensing apparatus in accordance with a second embodiment of the present invention;

Fig. 10 is a graph showing a relationship between an element D.C. resistance and an element temperature;

Fig. 11 is a graph showing an application voltage line on a V-I coordinate;

Fig. 12 is a circuit diagram showing a schematic arrangement of an air-fuel ratio sensing apparatus in accordance with a third embodiment of the present invention;

Fig. 13A is a view showing an equivalent circuit of the A/F sensor;

Fig. 13B is a view showing an equivalent circuit of the A/F sensor;

Fig. 13C is a view showing a model of a simple HPF realizing the equivalent circuit shown in Fig. 13B;

Fig. 14A is a graph showing frequency characteristic of the A/F sensor;

Fig. 14B is a graph showing frequency characteristic of an LPF;

Fig. 14C is a graph showing overall frequency characteristic of the circuit;

Fig. 15A is a view showing a circuit arrangement for reducing the change speed of the application voltage;

Fig. 15B is a time chart showing voltage changes;

Fig. 16 is a view showing changes of the application voltage and an element current in accordance with the a conventional microcomputer-based gas concentration detecting apparatus;

Fig. 17 is a graph showing frequency characteristics of a gas concentration sensor;

Fig. 18 is a graph showing an application voltage line on a V-I coordinate;

Fig. 19 is a view showing a model of a feedback system;

Fig. 20A is a time chart showing the application voltage;

Fig. 20B is a time chart showing the element current;

Fig. 20C is a time chart showing the inter-terminal resistance;

Fig. 21A is a view showing a circuit arrangement of the feedback system;

Fig. 21B is a graph showing the V-I characteristics; and

Fig. 22 is a view showing a model of the feedback system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0019] To solve the problems inherently caused by a microcomputer-based detecting apparatus, the inventors of the present invention have been researching an air-fuel ratio sensing apparatus capable of controlling the voltage applied to the sensor by using an analog circuit instead of using a microcomputer.

[0020] However, the air-fuel ratio sensing apparatus using an analog circuit will encounter with the following problems.

[0021] Fig. 3 shows V-I characteristics of a limit-current type sensor. A straight line portion parallel to the V-axis (i.e., the abscissa) of the V-I coordinate corresponds to a limit-current sensing region capable of identifying a limit current flowing across the sensor element (i.e., element current I_p). The change of element current I_p is dependent on increase or decrease of the air-fuel ratio (i.e., the degree of lean or rich). When the air-fuel ratio is in a lean side, the element current I_p shows an increased value. When the air-fuel ratio is in a rich side, the element current I_p shows a decreased value.

[0022] On the V-I characteristics, there is a resistance dominant region which extends to a lower voltage side from the straight line portion. The resistance dominant region is expressed by a first-order straight line. The inclination of this first-order straight line is determined by an element D.C. resistance R_i . It is generally known that there is a relationship " $R_i > Z_{ac}$ " when Z_{ac} represents an A.C. impedance of the sensor element.

[0023] An application voltage line L1 is given on the V-I coordinate shown in Fig. 3. This application voltage line L1 is parallel to the first-order straight line representing the resistance dominant region. The application voltage is determined according to this application voltage line L1 with reference to a momentary air-fuel ratio. When the air-fuel ratio is shifted to the lean side, an increased element current I_p flows across the A/F sensor. The application voltage is changed to a larger value in response to the increased element current I_p . Namely, the positive feedback of the application voltage is performed in a manner that the application voltage increases in response to the increase of the element current I_p . According to such positive feedback control, the application voltage oscillates when the gain of the feedback circuit exceeds "1."

[0024] More specifically, when the application voltage shows a steep or quick change due to disturbance or the like, the element current changes abruptly according to the above-described A.C. characteristics. Thus, when the circuit gain exceeds "1", the voltage applied to the A/F sensor becomes larger than an optimum voltage. In this case, the application voltage continuously increases until it reaches an upper limit restricted by the power source voltage. After that, the application voltage starts decreasing. By repeating increase and decrease in this manner, the application voltage causes oscillation. The oscillation of the application voltage gives adverse influence to the sensing accuracy in the air-fuel ratio detecting operation. Furthermore, the A/F sensor is subjected to excessively large voltages for a long time. This will lead to damage of the sensor element.

[0025] An "air-fuel ratio sensor" disclosed in Japanese Patent No. 2509905 is a conventional air-fuel ratio sensor. According to this prior art, the voltage applied to the sensor is controlled according to a momentary pump current (i.e., air-fuel ratio) so that the pump current shows stepwise changes each time it reaches the zero point level.

[0026] An "air-fuel ratio sensing apparatus" disclosed in Published Japanese Patent Application No. 7-18837 measures an electromotive force produced between first and second electrodes of the sensor. According to this prior art, the voltage applied to the sensor is controlled so as to equalize the electromotive force to a predetermined value.

[0027] However, according to each of the above-described prior art apparatuses, no consideration is given to the sensor A.C. characteristics. Therefore, all of these prior art apparatuses will suffer from the undesirable oscillation of the application voltage as described above.

[0028] Thus, the present invention has an object to provide a gas concentration sensing apparatus which is capable of effectively suppressing the oscillation of the application voltage and accurately detecting a gas concentration.

[0029] To control an application voltage applied to a gas concentration sensor, the application voltage control circuit inputs a detection value of current flowing across the sensor (i.e., a current signal) and varies the application voltage in accordance with the detected current signal. In this case, the circuit performs a positive feedback operation as a whole. Accordingly, when the overall circuit gain exceeds "1", the application voltage oscillates due to the sensor A.C. characteristics.

[0030] This can be explained from the fact that the gas concentration sensor is similar to a high-pass filter (HPF) in the A.C. characteristics as shown in Fig. 17. Fig. 13A is a model showing the gas concentration sensor. As understood from this model, the inter-terminal resistance (i.e., resistance between sensor terminals) decreases with increasing frequency. In Fig. 13A, R_g represents a particle resistance of the solid electrolytic member relative to the oxygen ion. R_i and C_i represent a particle resistance and an intergranular capacitance at a particle surface of the solid electrolytic member, respectively. R_f and C_f represent an electrode surface resistance and an electrode surface capacitance, respectively.

[0031] Meanwhile, the gas concentration sensor has an input equal to the application voltage (V) and an output equal to the sensor current (I). Therefore, the gain of this sensor is expressed in the following manner.

$$\begin{aligned} \text{Gain} &= \text{output} / \text{input} \\ &= \text{sensor current (I)} / \text{application voltage (V)} \\ &= 1 / R \end{aligned}$$

[0032] In general, the D.C. resistance R_i of the solid electrolytic element is larger than an A.C. impedance Z_{ac} of the solid electrolytic element (i.e., $R_i > Z_{ac}$). Accordingly, it is understood that the element A.C. impedance brings a larger gain compared with that of the element D.C. resistance.

[0033] Fig. 18 shows a static V-I characteristics of the gas concentration sensor. It is possible to draw an application voltage line parallel to the element D.C. resistance R_i (i.e., $R_i = RG$), so that an appropriate voltage is applied to the sensor in response to a variation of a D.C. signal component. However, it is impossible to maintain the application voltage to appropriate values during a transitional state (i.e., against variation of a A.C. signal component). Thus, the application voltage oscillates. In other words, the oscillation is derived from inherent properties of the sensor.

[0034] Hence, it is effective to determine stabilizing condition for preventing the gas concentration sensor from oscillating. In the model shown in Fig. 19, the transfer characteristics of this sensor can be expressed in the following equation:

$$\text{Sensor Transfer Characteristics} = \frac{1}{Z_{ac}} \cdot \frac{T_s}{TS + 1} \quad (1)$$

[0035] When "RG" represents an inclination of the application voltage line which is determined by the application voltage control circuit and a shunt resistance, the transfer function of this model can be expressed in the following equation.

$$\Delta I = \frac{(RG / Z_{ac}) \cdot T_s}{(1 - RG / Z_{ac}) Ts + 1} I_p \quad (2)$$

where "T" represents a time constant of the sensor.

[0036] Furthermore, a characteristic equation can be expressed in the following manner.

$$s + \frac{1}{T(1 - RG / Z_{ac})} = 0 \quad (3)$$

[0037] According to this characteristic equation, the stabilizing condition (i.e., oscillation suppressing condition) can be given in the following manner.

$$RG < Z_{ac}$$

[0038] In view of the foregoing, according to the present invention, the application voltage control circuit controls the voltage applied to the sensor in response to the current signal of the sensor. And, a resistance value (i.e., $RG = V/I$)

obtainable from a change rate of the application voltage is set to be smaller than an A.C. impedance (i.e., Z_{ac}) of the sensor element. To embody the present invention, an application voltage line is defined on a V-I coordinate for determining the voltage applied to the gas concentration sensor from the application voltage control circuit. And, an inclination of the application voltage line is larger than an inclination equivalent to the A.C. impedance of the sensor element in a sensor activated condition.

[0039] Namely, the application voltage line L_c is given on the V-I coordinate as shown in Fig. 6. A comparative application voltage line L_a has an inclination equivalent to the element D.C. resistance (i.e., 90Ω) of the sensor. Another comparative application voltage line L_b has an inclination equivalent to the element A.C. impedance of the sensor. The application voltage line L_c is steepest in the inclination angle when it is compared with other application voltage lines L_a and L_b . The application voltage line L_c is thus used to control the application voltage.

[0040] With such settings, it becomes possible to prevent the application voltage from being amplified so excessively that it is brought into oscillated condition, even when the application voltage is changed suddenly due to disturbance such as noises. Hence, it becomes possible to effectively suppress the oscillation of the application voltage. The gas concentration can be accurately detected. Furthermore, the above-described arrangement makes it possible to suppress undesirable oscillation of the application voltage without using a microcomputer which is generally expensive. Using no microcomputer is effective to eliminate the tailing phenomenon caused in response to each change of the application voltage.

[0041] The A.C. impedance of the sensor element decreases with increasing element temperature. Thus, the application voltage tends to oscillate when the element temperature is high. Hence, it is preferable to determine the inclination of the application voltage line with reference to the A.C. impedance at a reachable maximum temperature of the sensor element so that the oscillation of the application voltage can be surely suppressed even at this maximum temperature.

[0042] Preferably, a change speed of the application voltage is suppressed when the application voltage is controlled by the application voltage control circuit in response to the current signal. In this case, the oscillation phenomenon can be effectively suppressed even when the application voltage is changed suddenly due to disturbance such as noises. Hence, it becomes possible to effectively prevent the oscillation of the application voltage. The gas concentration can be accurately detected.

[0043] In a practical arrangement for embodying the invention, it is preferable to reduce the change speed of the application voltage produced by the application voltage control circuit in such a manner that a resistance value obtainable by the application voltage per unit time is smaller than the A.C. impedance of the sensor element.

[0044] In short, when the application voltage changes stepwise as shown in Fig. 20A, the current signal (i.e., the element current) changes as shown in Fig. 20B. When the application voltage changes suddenly, a voltage change per unit time is large. Namely, the frequency component is high. From the A.C. characteristics of the gas concentration sensor, the element A.C. impedance Z_{ac} becomes small. However, the frequency component becomes low after the abrupt change of the application voltage. The element A.C. impedance Z_{ac} is gradually increased (refer to the frequency characteristics shown in Fig. 17). Meanwhile, as shown in Fig. 20C, the inter-terminal resistance of the gas concentration sensor shows an apparent change in each unit time.

[0045] In this case, to suppress the oscillation of the application voltage, it is preferable to set the resistance value obtainable by the application voltage line per unit time to be smaller than the A.C. impedance of the sensor element. The inclination of the application voltage becomes steep. Practically, it is effective to reduce the change speed of the application voltage. In response to the reduction of the change speed of the application voltage, the resistance value obtainable by the application voltage per unit time is reduced. Thus, the application voltage line can temporarily have a steep inclination.

[0046] For example, the change speed of the application voltage can be suppressed by adding a delay circuit in the feedback system as shown in Fig. 21A. With this arrangement, it becomes possible to suppress a transitional element current (i.e., A.C. current component) which is detectable by a shunt resistance. The application voltage causes a small change in response to a large current change. Thus, the application voltage line has a steep inclination (refer to Fig. 21B). From the foregoing, it becomes possible to suppress the oscillation of the application voltage.

[0047] Preferably, a low-pass filter (i.e., LPF) is provided as a means for delaying the change speed of the application voltage controlled by the application voltage control circuit in response to the current signal. In this case, the LPF moderates or absorbs every prompt voltage change caused by noises or the like. Thus, it becomes possible to eliminate the problems, i.e., the oscillation of the application voltage or deterioration of sensing accuracy in the gas concentration detecting operation. Fig. 22 shows a model including the LPF. The stabilizing condition for suppressing the oscillation can be derived by calculating the transfer function and the characteristic equation in the same manner as in the calculations using the equations 2 and 3. The stabilizing condition in this case can be expressed in the following manner.

$$RG < (1 + T_L/T) \cdot Z_{ac}$$

where "T" represents the time constant of the sensor, " T_L " represents the time constant of the LPF, and "RG" represents the inclination of the application voltage.

[0048] Accordingly, adding the LPF enlarges the range of the stabilizing condition and ensures the effect of suppressing the oscillation. Regarding the calculation for the stabilizing condition, the judgement in a narrow sense can be performed by using other judgements, such as Nyquist stability criterion. By adding the LPF, it becomes possible to set an application voltage line parallel to the element D.C. resistance R_i on the V-I characteristics of the sensor element. This eliminates errors in the gas concentration detecting operation.

[0049] Preferably, an operational amplifier constituting the application voltage control circuit has a slow through rate so as to serve as the delay means for reducing the change speed of the application voltage which is controlled by the application voltage control circuit in response to the current signal. For example, the through rate of this operational amplifier is delayed so that the resistance value obtainable by the application voltage per unit time becomes smaller than the A.C. impedance of the sensor element.

[0050] Preferably, an overall gain of a feedback loop including the gas concentration sensor and the application voltage control circuit is always equal to or smaller than 1. It is effective to provide a gas concentration sensing apparatus capable of preferably suppressing the oscillation of the application voltage and also accurately detecting the gas concentration.

[0051] Preferably, an application voltage line is defined on the V-I coordinate for determining the voltage applied to the gas concentration sensor, and an inclination of the application voltage line is equalized to an inclination equivalent to the D.C. resistance of the gas concentration sensor element in a sensor activated condition. As described above, by reducing the change speed of the application voltage or setting the overall gain of the feedback circuit to be equal to or smaller than 1, and also by equalizing the inclination of the application voltage to the inclination equivalent to the element D.C. resistance, the gas concentration sensing apparatus is preferably applied to an air-fuel ratio control system for performing a lean burn control of an internal combustion engine so that a wide range of the air-fuel ratio can be detected.

[0052] Preferably, a plurality of application voltage lines different in their inclinations are set on the V-I coordinate to selectively or continuously use the plurality of application voltage lines in accordance with the temperature of the sensor element. Temperature change of the sensor element induces the shift of the limit-current sensing region shown in Fig. 3. However, providing the plurality of different application voltage lines makes it possible to select an optimum application voltage line in accordance with the momentary temperature of the sensor element. Thus, it becomes possible to prevent the gas concentration from being erroneously detected.

[0053] Hereinafter, preferred embodiments of the present invention will be explained in greater detail with reference to attached drawings. Identical parts are denoted by the same reference numerals throughout the views.

First Embodiment

[0054] The present invention can be embodied as an air-fuel ratio sensing apparatus. Thus, a first embodiment embodying such an air-fuel ratio sensing apparatus will be explained with reference to attached drawings.

[0055] The air-fuel ratio sensing apparatus of this embodiment can be incorporated into an electronically controlled gasoline injection engine installed in an automotive vehicle. In an air-fuel ratio control system of this engine, a fuel injection amount to be supplied to the engine is controlled based on the sensing result of the air-fuel ratio sensing apparatus so that the air-fuel ratio is equalized to a desirable value. According to this embodiment, the air-fuel ratio sensing apparatus is constituted by an analog circuit. This analog circuit controls an application voltage applied to a limit-current type A/F sensor. Furthermore, the analog circuit obtains air-fuel ratio information as well as element resistance information.

[0056] Fig. 1 is a circuit diagram showing a schematic arrangement of the air-fuel ratio sensing apparatus in accordance with first embodiment. In Fig. 1, an A/F sensor 10 has a sensor element portion 10a including a solid electrolytic member (refer to Fig. 2). The A/F sensor 10 detects an oxygen concentration in an exhaust gas emitted from the engine. Namely, the A/F sensor 10 produces a limit current (i.e., element current) which is responsive to the oxygen concentration in the exhaust gas in accordance with the application voltage applied to the sensor element portion 10a.

[0057] Fig. 2 shows a detailed arrangement of the sensor element portion 10a. The sensor element portion 10a is roughly constituted by a solid electrolytic member 11, a gas diffusive resistor layer 12, an air introducing duct 13, and a heater 14 which are laminated or stacked in a multilayered arrangement. All the multilayered members are surrounded by a protection layer 15.

[0058] The solid electrolytic member 11 is configured into an oblong plate and made of a partially-stabilized zirconia sheet. A measuring electrode 16, which is porous and made of platinum or the like, is provided on an upper surface of the solid electrolytic member 11 by screen printing. In other words, the measuring electrode 16 is provided on the surface of the solid electrolytic member 11 which is closer to the gas diffusive resistor layer 12. An atmospheric electrode 17, which is porous and made of platinum or the like, is provided on a lower upper surface of the solid electrolytic member 11 by screen printing. In other words, the atmospheric electrode 17 is provided on the opposite surface of the solid

electrolytic member 11 which is closer to the air introducing duct 13.

[0059] The gas diffusive resistor layer 12 comprises a gas permeable layer 12a and a gas shielding layer 12b. The gas permeable layer 12a is made of a porous sheet and introduces the exhaust gas to the measuring electrode 16. The gas shielding layer 12b is made of a gas-tight sheet capable of suppressing the penetration of the exhaust gas. Each of the gas permeable layer 12a and the gas shielding layer 12b is manufactured from a ceramic material, such as alumina, spinel and zirconia, by using a sheet forming technique. The gas permeability of each layer 12a or 12b is differentiated by controlling an average pore size and a porosity.

[0060] The air introducing duct 13 is made of a high heat conductive ceramic material, such as alumina. An atmospheric chamber 18 is defined by the air introducing duct 13. The atmospheric electrode 17 is exposed to the air introduced into the atmospheric chamber 18 via the air introducing duct 13. The heater 14 is provided along the lower surface of the air introducing duct 13. The heater 14 comprises a plurality of heat generating elements 14a which generate heat in response to electric power supplied from a power battery. The heat generating elements 14a are covered by an insulating sheet 14b. However, the arrangement shown in Fig. 2 can be variously modified. For example, it is possible to embed each heat generating element 14a in the solid electrolytic member 11 or in the gas diffusive resistor layer 12.

[0061] According to the above-described arrangement of the sensor element portion 10a, the exhaust gas reaches the measuring electrode 16 without passing in the vertical direction (i.e., up-and-down direction in Fig. 2) of the gas permeable layer 12a. In other words, the exhaust gas enters from each lateral side of the gas permeable layer 12a. More specifically, as the surface of the gas permeable layer 12a is covered by the gas shielding layer 12b, the exhaust gas cannot flow in the vertical direction. Thus, the exhaust gas enters from the side surface of the gas permeable layer 12a and flows inside the gas permeable layer 12a in a direction normal to the vertical direction. In this case, the gas diffusion amount in the gas permeable layer 12a is dependent on the transverse (i.e., right-and-left directional) size of the gas permeable layer 12a. Actually, it depends on a distance between the side surface of the gas permeable layer 12a and the measuring electrode 16. This size can be easily and flexibly set. This makes it possible to stabilize the sensor output even if the pore size of the gas permeable layer 12a is not stable.

[0062] According to the above-described A/F sensor 10, the sensor element portion 10a produces limit current responsive to the oxygen concentration when the air-fuel ratio is shifted toward a lean region with respect to a theoretical (i.e., stoichiometric) air-fuel ratio. In this case, the sensor element portion 10a (i.e., solid electrolytic member 11) can use a linear characteristic in detecting the oxygen concentration. However, the sensor element portion 10a is not activated until the sensor temperature is increased up to approximately 600 °C. Furthermore, due to a narrow activation temperature range of the sensor element portion 10a, it is difficult to maintain the activated condition by using only the exhaust gas of the engine. Accordingly, in this embodiment, the heater 14 (i.e., heat generating portion 14a) is controlled to maintain the temperature of the sensor element portion 10a in the activation temperature range. When the air-fuel ratio is shifted toward a rich region with respect to the theoretical air-fuel ratio, some concentration unburnt gases, such as carbon monoxide (CO), show a linear change in accordance with the air-fuel ratio. The sensor element portion 10a thus generates limit current responsive to the concentration of such unburnt gas.

[0063] Fig. 3 shows the V-I characteristics of the A/F sensor 10. In Fig. 3, the element current I_p (i.e., limit current) increases or decreases in response to the air-fuel ratio. The element current I_p increases as the air-fuel ratio shifts toward the lean side. On the other hand, the element current I_p decreases as the air-fuel ratio shifts toward the rich side. The voltage region extending from the straight-line portion (i.e., limit-current sensing region) to the lower voltage side is the resistance dominant region. In this resistance dominant region, the inclination of the first-order straight line portion is equivalent to the D.C. resistance R_i of the sensor element portion 10a (i.e., solid electrolytic member 11). This inclination varies in accordance with the element temperature. For example, the element D.C. resistance R_i increases with decreasing element temperature. The inclination becomes small. The element A.C. impedance Z_{ac} is regulated with respect to the element D.C. resistance R_i as shown in Fig. 3 (i.e., $R_i > Z_{ac}$).

[0064] As shown in Fig. 1, an application voltage control circuit 21 comprises an operational amplifier 21a and resistors 21b and 21c. The operational amplifier 21a has a non-inverting input terminal receiving a reference voltage REF1. The reference voltage REF1 is generally adjustable by an air-fuel ratio sensing application voltage. For example, the reference voltage REF1 is temporarily switched to an element resistance detecting application voltage every 128 msec. An output of the application voltage control circuit 21 is applied to one terminal of the A/F sensor 10 via a driver circuit 22.

[0065] The other terminal of the A/F sensor 10 is connected to an output terminal of an operational amplifier 23 via a current-detecting resistor 24. The operational amplifier 23 has a non-inverting input terminal receiving a reference voltage REF2. According to this embodiment, in order to use a single power source for this circuit, the reference voltage REF2 serves as a virtual ground. The current-detecting resistor 24 converts the element current flowing across the A/F sensor 10 into a voltage value. The converted voltage value representing the element current is supplied to a S/H (i.e., sample hold) circuit 25 and a P/H (i.e., peak hold) circuit 26.

[0066] The S/H circuit 25 samples the element current during the air-fuel ratio detecting operation, and successively

updates the sample value and outputs the updated sample value in a predetermined gate-on period. An output of the S/H circuit 25 is a signal representing the detected air-fuel ratio and is, for example, sent to an engine control unit ECU (not shown). The air-fuel ratio feedback control can be thus performed based on this air-fuel ratio detecting value.

[0067] The P/H circuit 26 holds a peak value of the element current during a predetermined gate-on period corresponding to the element resistance detecting operation. The peak hold value of the P/H circuit 26 is sent to a S/H (i.e., sample hold) circuit 27. The S/H circuit 27 successively updates the sample value and outputs the updated sample value as a detection value of the element resistance. The detected element resistance value is, for example, sent to the engine control unit ECU. The engine control unit ECU can use the received element resistance value for various purposes, e.g., activation judgement, activation control, and diagnosis, relating to the A/F sensor 10. The peak hold value of the element current is reset in response to each gate-off operation.

[0068] The element current (i.e., the converted voltage value), detected by the current-detecting resistor 24, is returned to the application voltage control circuit 21 via a buffer 28. According to the apparatus shown in Fig. 1, the current flowing across the A/F sensor 10 varies in response to the air-fuel ratio. The application voltage is changed in accordance with the change of the detected current value. Through such a feedback control, the application voltage applied to the A/F sensor 19 is always controlled to an appropriate value.

[0069] During the element resistance detecting operation, the application voltage (i.e., reference voltage REF1) of the application voltage control circuit 21 is temporarily changed to a positive value and a negative value from the voltage value having been set for the preceding air-fuel ratio detecting operation. In this case, according to the frequency characteristics of the A/F sensor 10, the frequency of the application voltage for the element resistance detecting operation is set to 1 kHz or above. When seeking more stable characteristics, it is preferable to increase the frequency up to 3 kHz or above. By increasing the frequency, it becomes possible to shorten the detecting time of the element resistance. In other words, the dormant period of the air-fuel ratio detecting operation can be reduced.

[0070] The activation control of the A/F sensor 10 is performed in such a manner that the sensor element portion 10a is maintained at a predetermined activation temperature (e.g., 700°C). Fig. 10 shows a relationship between the sensor temperature and the element resistance. A target element resistance for the designated activation temperature is given from the curve shown in Fig. 10. Thus, the element resistance is feedback controlled to the target value. For example, such a feedback control of the element resistance (i.e., element temperature) can be realized by controlling a duty ratio of electric power supplied to the heater 14.

[0071] In this manner, the application voltage control circuit 21 varies the application voltage of the A/F sensor 10 in accordance with the detected element current (i.e., converted voltage value). However, when the overall gain of the feedback circuit shown in Fig. 1 exceeds "1", the application voltage causes oscillation. It is now assumed that the element D.C. resistance R_i is 90Ω at the sensor activated condition (i.e., at the element temperature 700°C). Furthermore, as shown in Fig. 4, an application voltage line L_a is set to have an inclination parallel to that of the resistance dominant region. According to the application voltage line L_a of Fig. 4, "0.552V" is applied to the A/F sensor 10 when the air-fuel ratio is equivalent to the air. And, "0.3V" is applied to the A/F sensor 10 when the air-fuel ratio is equivalent to the stoichiometric air-fuel ratio.

[0072] Namely, the circuit parameters of the apparatus shown in Fig. 1 are determined in the following manner. The reference voltage REF2 is 3V (the voltage of a point "C" is also 3V). The resistance value of the current-detecting resistor 24 is 560Ω. The element current I_p is 2.8mA for the air and 0 mA for the stoichiometric air-fuel ratio.

[0073] In this case, when the A/F ratio sensor 10 detects the air, the voltage value of the point "A" shown in Fig. 1 is given in the following manner.

$$3V + 2.8mA \times 560\Omega = 4.568V$$

[0074] The voltage value of the point "B" shown in Fig. 1 is given in the following manner.

$$3V - 0.552V = 2.448V$$

[0075] Similarly, when the A/F ratio sensor 10 detects the stoichiometric air-fuel ratio, the voltage value of the point "A" is given in the following manner.

$$3V + 0mA \times 560\Omega = 3V$$

[0076] The voltage value of the point "B" is given in the following manner.

$$2.7V = 3V - 0.3V$$

[0077] Accordingly, the gain β of the application voltage control circuit 21 is determined in the following manner.

$$\beta = \frac{\text{Output}}{\text{Input}} = \frac{2.448 - 2.7}{4.568 - 3} = - \frac{0.252}{1.568} \quad (4)$$

5 [0078] The gain β (0.252/1.568) is determined by the ratio ($R1/R2$) of the resistance values $R1$ and $R2$ of the resistors 21b and 21c.

[0079] Under the condition that the gain β is 0.252/1.568, the application voltage may change in response to generation of noise due to the A.C. characteristics of the A/F sensor 10. It is assumed that, when the element D.C. resistance R_i is 90 Ω , the element A.C. impedance Z_{ac} is 80 Ω .

10 [0080] It is further assumed that the application voltage (i.e., the voltage at the point B in Fig. 1) showed a sudden change of "+0.1V" due to noise as shown in Fig. 5. The element current I_p changes by 1.25mA ($=0.1V/80\Omega$) according to the application voltage line L_b having the inclination equivalent to the element A.C. impedance. In this case, the voltage at the point A changes by 0.7V ($=1.25mA \times 560\Omega$). In response to this voltage change, the voltage at the point B (i.e., sensor application voltage) changes by 0.1125V ($=0.7V \times \text{gain } \beta$). Accordingly, the sensor application voltage increases by 12.5 mV compared with the condition prior to the noise generation. Thus, the application voltage oscillates as a result of repetition of such voltage change.

15 [0081] On the other hand, in the feedback circuit constituted by the application voltage control circuit 21, A/F sensor 10 and current-detecting resistor 24, the gain of A/F sensor 10 based on the A.C. characteristics is expressed in the following manner.

$$\frac{\text{Output}}{\text{Input}} = \frac{I_p (\text{mA})}{V (\text{V})} = \frac{1}{R (\Omega)} = \frac{1}{80} \quad (5)$$

20 [0082] Furthermore, the gain of current-detecting resistor 24 is expressed in the following manner.

$$\frac{\text{Output}}{\text{Input}} = \frac{V (\text{V})}{I_p (\text{mA})} = R (\Omega) = 560 \quad (6)$$

30 [0083] Accordingly, the overall gain of the feedback circuit is given in the following manner.

$$\beta \times (1/80) \times 560 = 1.125$$

35 [0084] It is understood that the oscillation occurs as the overall gain exceeds 1.

[0085] As explained above, when the inclination of the resistance dominant region (i.e., element D.C. resistance R_i) is identical with the inclination of the application voltage line L_a on the V-I characteristics (refer to Fig. 4), the application voltage causes oscillation in response to the generation of noise.

40 [0086] When the application voltage is changed according to the D.C. characteristics of the A/F sensor 10, an overall gain of the feedback circuit is expressed in the following manner.

$$\beta \times (1/90) \times 560 = 1$$

45 [0087] It is understood that no oscillation phenomenon occurs when the application voltage varies in accordance with the element current I_p .

[0088] This embodiment uses an application voltage L_c having an inclination larger (i.e., steeper) than that of the application voltage L_b (equivalent to the element A.C. impedance Z_{ac}) shown in Fig. 6. Thus, the oscillation phenomenon caused by noises can be surely suppressed.

[0089] For example, the gain β of the application voltage control circuit 21 may be given in the following manner.

$$\beta = \frac{0.21}{1.568} \quad (7)$$

55 [0090] In this case, the overall gain of the feedback circuit based on the A.C. characteristics is expressed in the following manner.

$$\beta \times (1/80) \times 560 = 0.9338$$

[0091] Namely, as the overall gain is less than "1", it is understood that no oscillation occurs in response to occurrence of noise. In fact, to adjust the gain β in the above-described manner, the resistance values R1 and R2 of the resistors 21b and 21c are set to R1=1k Ω and R2=7.5k Ω in the application voltage control circuit 21.

[0092] As described above, the gain according to the A.C. characteristics of A/F sensor 10 is 1/80. The gain of the current-detecting resistor 24 is 560. Thus, to suppress the overall gain of the feedback circuit to value smaller than "1", the gain β needs to satisfy the following condition.

$$\beta < \frac{0.224}{1.568} \quad (8)$$

[0093] By satisfying this condition, the change rate of the application voltage produced by the application voltage control circuit 21 becomes smaller than the change rate corresponding to the A.C. characteristics of the A/C sensor 10. Thus, it becomes possible to suppress the oscillation phenomenon of the application voltage due to the sensor A.C. characteristics.

[0094] Furthermore, to obtain the desired sensor output characteristics (i.e., V-I characteristics), the A/F sensor 10 is maintained in a predetermined activation temperature region. However, the exhaust gas temperature increases when the engine is driven in a high speed or high load condition. The sensor element temperature increases in accordance with the exhaust gas temperature. The element resistance (i.e., element A.C. impedance Z_{ac}) decreases. When the element A.C. impedance Z_{ac} decreases, the gain of A/C sensor 10 increases. The application voltage tends to oscillate. Hence, according to this embodiment, increase of the exhaust gas temperature or the like is taken into consideration in determining the inclination of the application voltage. More specifically, the inclination of the application voltage line is determined under the specific condition where the A.C. impedance Z_{ac} is most lowest, i.e., under the condition where the element temperature is most highest.

[0095] The above-described first embodiment of the present invention has the following effects.

(a) In the application voltage control circuit 21, the inclination of the application voltage line on the V-I coordinate is set to be larger than the inclination equivalent to the element A.C. impedance Z_{ac} in the sensor activated condition. In this case, the overall gain of the feedback circuit including the application voltage control circuit 21 and the A/F sensor 10 is suppressed to a value smaller than 1. According to the above-described arrangement, it becomes possible to prevent the application voltage from being amplified by the application voltage control circuit 21 so excessively that it is brought into oscillated condition, even when the application voltage is changed suddenly due to power-on operation or occurrence of disturbance or the like. Hence, it becomes possible to effectively suppress the oscillation of the application voltage. The gas concentration can be accurately detected. Furthermore, by suppressing the oscillation of the application voltage, it becomes possible to prevent the A/F sensor 10 from being subjected to excessively large voltages for a long time. Thus, the sensor element is not damaged.

(b) Furthermore, the above-described embodiment makes it possible to suppress undesirable oscillation of the application voltage without using a microcomputer which is generally expensive. Using no microcomputer is effective to eliminate the tailing phenomenon caused in response to each change of the application voltage. In the element resistance detecting operation, the frequency of the application voltage is not restricted by the processing ability of each microcomputer. As the switching operation of the application voltage is performed at a high frequency, the dormant period of the air-fuel ratio detecting operation can be shortened. Such reduction of the dormant period leads to small dispersion in detected air-fuel ratio values in respective cylinders of the engine. In other words, the D/A or A/D converter and the microcomputer need not to have high-speed processing capability. This brings cost reduction and downsizing effects.

(c) Moreover, the above-described embodiment realizes an air-fuel ratio sensing apparatus using a multilayered A/F sensor (refer to Fig. 2) which has excellent warmup ability even in an engine cold startup condition. Accordingly, the sensor element 10a is promptly warmed up. For example, it takes only several seconds until the application voltage line L_c shown in Fig. 6 becomes usable. In this case, it is not necessary to provide a plurality of application voltage lines. The application voltage control for the A/F sensor 10 can be performed by using the application voltage line L_c only.

[0096] Next, second and third embodiments of the present invention will be explained. In each embodiment, parts or components substantially identical with those disclosed in the first embodiment are denoted by the same reference numerals and not explained in detail. Hereinafter, difference between the second or third embodiment and the above-described first embodiment will be chiefly explained.

Second Embodiment

[0097] According to the above-described first embodiment, the inclination of the application voltage line is determined based on the most-lowest A.C. impedance Z_{ac} (i.e., most-highest element temperature) so that the oscillation of application voltage can be suppressed even in the high-speed and high-load conditions. However, when the sensor element temperature decreases in response to reduction of the exhaust gas temperature, the element resistance increases according to the relationship shown in Fig. 10. In this case, the application voltage line may not cross the limit-current sensing region (i.e., straight-line portion parallel to the V-axis) as shown in Fig. 7. The sensing accuracy in the air-fuel ratio detecting operation will be worsened. More specifically, when the application voltage line L_c crosses the limit-current sensing region at the point P1 of Fig. 7, the element current I_p corresponding to the point P1 correctly represents the air-fuel ratio. However, when the application voltage line L_c crosses the resistance dominant region at the point P2 of Fig. 7, the element current I_p corresponding to the point P2 erroneously represents the air-fuel ratio.

[0098] Hence, according to the second embodiment, as shown in Fig. 8, another application voltage line L_d is provided in addition to the application voltage line L_c determined based on the above-described high-temperature condition. Two application voltage lines L_c and L_d are selectively used in accordance with element temperature information which is momentarily obtained.

[0099] Fig. 9 is a schematic circuit diagram showing an arrangement of an air-fuel ratio sensing apparatus in accordance with the second embodiment. An application voltage control circuit 30 selects one of two application voltage lines L_c and L_d . For example:

(1) One application voltage line L_c has an inclination larger or steeper than the inclination equivalent to the A.C. impedance Z_{ac} at a predetermined high-temperature condition (e.g., element temperature = approximately 800°C); and

(2) The other application voltage line L_d has an inclination larger or steeper than the inclination equivalent to the A.C. impedance Z_{ac} at a reduced -temperature condition (e.g., element temperature = approximately 600°C).

[0100] The application voltage control circuit 30 controls the application voltage in accordance with the selected application voltage line. An application voltage switch signal is produced based on the element temperature information. Selection between application voltage lines L_c and L_d is performed with reference to the application voltage switch signal.

[0101] Accordingly, when the engine is operated in the high-speed and high-load conditions, the gain of the application voltage control circuit 30 is adjusted so as to correspond to the application voltage line L_c . In this case, the application voltage is controlled in accordance with the application voltage line L_c so that the oscillation of the application voltage is surely suppressed in the high-speed and high-load conditions. Furthermore, when the sensor temperature is lowered, the gain of the application voltage control circuit 30 is changed so as to correspond to the other application voltage line L_d . The application voltage is thus controlled in accordance with the application voltage line L_d so that the oscillation of the application voltage is surely suppressed in the lower-temperature conditions.

[0102] As apparent from the foregoing description, the above-described second embodiment brings the following effects in addition to the effects of the above-described first embodiment. Namely, a plurality of application voltage lines having different inclinations are provided on the V-I coordinate. One of these plurality of application voltage lines is selected in accordance with the sensor element temperature. Thus, it becomes possible to accurately detect the air-fuel ratio even when the sensor element temperature is decreased unexpectedly.

Third Embodiment

[0103] When the air-fuel ratio control is performed in the vicinity of the stoichiometric air-fuel ratio, an air-fuel ratio sensing region generally ranges from 12 to 18. On the other hand, when the lean burn control is performed to adjust the air-fuel ratio to a lean side, the air-fuel ratio sensing region extends adjacent to 30 as shown in Fig. 11. Hence, when the inclination of the application voltage line is larger or steeper than the inclination of the resistance dominant region, the application voltage may not cross the limit-current sensing region. The sensing accuracy of the air-fuel ratio is worsened.

[0104] According to the third embodiment of the present invention, the inclination of the application voltage line is equalized with that of the resistance dominant region on the V-I characteristics so that the application voltage line always crosses the limit current sensing region. Furthermore, a LPF (i.e., low-pass filter) is incorporated in the air-fuel ratio sensing apparatus to suppress the oscillation of the application voltage.

[0105] Fig. 12 is a schematic circuit diagram showing an arrangement of an air-fuel ratio sensing apparatus in accordance with the third embodiment. In Fig. 12, an element current value detected by the current-detecting resistor 24 is supplied via a buffer 28 to a first-order LPF 31 consisting of a capacitor 31a and a resistor 31b. The LPF 31 removes

high-frequency components of the element current. After being processed in the LPF 31, the element current is returned via a buffer 29 to the application voltage control circuit 21. The LPF 31 is not limited to a first-order LPF and therefore can be replaced by a second-order or third-order LPF. Furthermore, the LPF 31 can be provided anywhere in the feedback circuit including the application voltage control circuit 21 and the A/F sensor 10. For example, it is possible to provide the LPF 31 at an output side of the application voltage control circuit 21.

[0106] Fig. 13A shows an equivalent circuit of the limit-current type A/F sensor 10 using the solid electrolytic member. In Fig. 13A, R_g represents a particle resistance of the solid electrolytic element relative to the oxygen ion. R_i and C_i represent a particle resistance and an intergranular capacitance at a particle surface of the solid electrolytic member, respectively. R_f and C_f represent an electrode surface resistance and an electrode surface capacitance, respectively. In a practical circuit, the rising of the actual voltage applied to the A/F sensor 10 is in a level of several to several tens kHz. Almost all of the current flows across the path of R_g - R_i - C_f . Hence, the equivalent circuit shown in Fig. 13A can be modified into a simple circuit shown in Fig. 13B. Furthermore, Fig. 13C shows a model of a simple HPF (i.e., high-pass filter) realizing the equivalent circuit shown in Fig. 13B.

[0107] In this case, the frequency characteristics of the A/F sensor 10 is shown in Fig. 14A. The frequency characteristics of the LPF 31 is shown in Fig. 14B. Accordingly, the overall frequency characteristics of the circuit is shown in Fig. 14C. The gain is smaller than 1 in the entire frequency range. Thus, it becomes possible to suppress the oscillation of the application voltage.

[0108] When the LPF 31 is incorporated in the circuit, the sensor response is significantly worsened. Thus, it is necessary to determine the time constant by considering such deterioration of sensor response together with the suppression of the oscillation. Furthermore, in determining the time constant, it is desirable to take unevenness of the sensor and its parts into consideration. According to this embodiment, the time constant of LPF 31 is set to approximately 10Hz.

[0109] As described above, according to the third embodiment, the LPF 31 is incorporated into the air-fuel ratio sensing apparatus to reduce the change speed of the application voltage in the application voltage control circuit 21. Thus, the sudden voltage change occurring due to noise or the like can be moderated or absorbed by the LPF 31. It becomes possible to suppress the application voltage from oscillating. Furthermore, the sensing accuracy in the air-fuel ratio detecting operation can be maintained at an adequate level.

[0110] Furthermore, the inclination of the application voltage line on the V-I coordinate is equalized with the inclination equivalent to the element D.C. resistance R_i of the A/F sensor 10 in the sensor activated condition. With this setting, it becomes possible to adequately detect the air-fuel ratio in a wide range. Thus, this embodiment is preferably applied to the air-fuel ratio control system for performing the lean burn control.

[0111] The present invention can be embodied in various ways.

[0112] For example, the following arrangements can be used for suppressing the overall gain of the feedback circuit to a value less than 1, and for reducing the change speed of the application voltage produced by the application voltage control circuit in accordance with the current signal.

(a) The change speed of the application voltage produced by the application voltage control circuit 21 is reduced in such a manner that a resistance value obtainable by the application voltage per unit time is smaller than the A.C. impedance Z_{ac} of the sensor element portion 10a. For example, a delay circuit is added in the feedback system as shown in Fig. 21A. With this arrangement, it becomes possible to limit the transitional element current (A.C. current component) detectable by a shunt resistor (serving as the current-detecting resistor 24). The application voltage change is relatively small compared with a large current change. Thus, the application voltage line becomes steep.

(b) As a means for reducing the change speed of the application voltage produced by the application voltage control circuit 21, it is preferable that the operational amplifier 21a in the application voltage control circuit 21 has a slow through rate. For example, the through rate of the operational amplifier 21a is delayed so that the resistance value obtainable by the application voltage per unit time becomes smaller than the A.C. impedance Z_{ac} of the sensor element.

(c) The LPF 31 shown in Fig. 12 can be replaced by an integrating circuit.

(d) The LPF 31 shown in Fig. 12 can be replaced by a circuit shown in Fig. 15A. The circuit shown in Fig. 15A uses a constant-current circuit 32 instead of using the resistor 31a of the LPF 31. Fig. 15B shows the change ($V_1 \rightarrow V_2$) of the application voltage obtained by providing the circuit shown in Fig. 15A. As apparent from Fig. 15B, the change speed of the application voltage can be reduced adequately. In any of the above-described (a) through (d) cases, the purpose of the present invention can be attained. Namely, the oscillation of the application voltage can be adequately suppressed.

[0113] According to the above-described second embodiment, a plurality of application voltage lines are selectively used. However, this arrangement can be modified in the following manner.

[0114] It is preferable to momentarily vary the gain of the application voltage control circuit in accordance with the

sensor element temperature (element resistance) so that the inclination of the application voltage line can be continuously changed. For example, the resistor 21c shown in Fig. 1 can be replaced by a variable resistor having a resistance value changeable in accordance with the sensor element temperature (element resistor).

[0115] In the above-described first to third embodiments, it is preferable to provide another application voltage line applicable to a low-temperature condition so that the application voltage for the A/F sensor can be controlled even in a transient state reaching the activated condition from the cold condition. In this case, it is preferable to provide a plurality of application voltage lines including the additionally provided application voltage line for the low-temperature condition. It becomes possible to appropriately control the application voltage in every temperature region.

[0116] Each of the above-described embodiments can be embodied as an air-fuel ratio sensing apparatus using a cup-shaped air-fuel ratio sensor in the same manner as in the air-fuel ratio sensing apparatus using the multilayered air-fuel ratio sensor. Furthermore, the present invention can be applied to other gas concentration sensing apparatuses using another type gas concentration sensors which detect NO_x, HC, CO or the like. In such other gas concentration sensing apparatuses, the oscillation of the application voltage can be suppressed and the gas concentration can be accurately detected by using the techniques disclosed in the above-described embodiments.

[0117] This invention may be embodied in several forms without departing from the spirit of essential characteristics thereof. The present embodiments as described are therefore intended to be only illustrative and not restrictive, since the scope of the invention is defined by the appended claims rather than by the description preceding them. All changes that fall within the metes and bounds of the claims, or equivalents of such metes and bounds, are therefore intended to be embraced by the claims.

[0118] A limit-current type A/F sensor (10) produces element current responsive to oxygen concentration in the exhaust gas when a voltage is applied to its sensor element portion. An application voltage control circuit (21) comprises an operational amplifier (21a) and resistors (21b, 21c). An output of the control circuit (21) is applied to one terminal of the A/F sensor (10) via a driver circuit (22). The other terminal of the A/F sensor (10) is connected to an output terminal of an operational amplifier (23) via a current-detecting resistor (24). The element current value, detected by the current-detecting resistor (24), is returned to the application voltage control circuit (21) via a buffer (28). In the application voltage control circuit (21), adjustment of the gain is performed in such a manner that the inclination of the application voltage line on the V-I coordinate becomes larger than the inclination equivalent to the A.C. impedance of the sensor element in the sensor activated condition.

Claims

1. A gas concentration sensing apparatus comprising:

a sensor element (10a) including a solid electrolytic member (11) with electrodes (16, 17) provided on opposed surfaces of said solid electrolytic member;
a gas concentration sensor (10) for generating a current signal (I_p) responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between said electrodes (16, 17) of said sensor element (10a); and
an application voltage control circuit (21) for feedback controlling the application voltage (V) applied to said gas concentration sensor (10) in response to said current signal, characterized in that
a resistance value (R_G) obtainable from a change rate of said application voltage (V) controlled by said application voltage control circuit (21) in response to said current signal is set to be smaller than an A.C. impedance (Z_{ac}) of said sensor element.

2. The gas concentration sensing apparatus in accordance with claim 1, wherein

an application voltage line (L_c) is defined on a V-I coordinate for determining the voltage (V) applied to said gas concentration sensor (10) from said application voltage control circuit (21), and
an inclination of said application voltage line (L_c) is larger than an inclination equivalent to said A.C. impedance (Z_{ac}) of said sensor element (10a) in a sensor activated condition.

3. A gas concentration sensing apparatus comprising:

a sensor element (10a) including a solid electrolytic member (11) with electrodes (16, 17) provided on opposed surfaces of said solid electrolytic member;
a gas concentration sensor (10) for generating a current signal (I_p) responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between said electrodes (16, 17) of said sen-

5 sor element (10a); and

an application voltage control circuit (21) for feedback controlling said voltage applied to said gas concentration sensor in response to said current signal, characterized in that

5 a change speed of said application voltage (V) is suppressed in a feedback loop of said application voltage control circuit (21).

4. The gas concentration sensing apparatus in accordance with claim 3, wherein said change speed of said application voltage (V) produced by said application voltage control circuit (21) is reduced in such a manner that a resistance value obtainable by the application voltage per unit time is smaller than an A.C. impedance (Z_{ac}) of the sensor element.

5. The gas concentration sensing apparatus in accordance with claim 3, wherein a low-pass filter (LPF) is provided as a delay means for reducing the change speed of the application voltage controlled by the application voltage control circuit in response to the current signal.

6. The gas concentration sensing apparatus in accordance with claim 3, wherein an operational amplifier (21a) constituting said application voltage control circuit (21) has a slow through rate so as to serve as a delay means for reducing the change speed of the application voltage controlled by the application voltage control circuit (21) in response to the current signal.

7. A gas concentration sensing apparatus comprising:

25 a sensor element (10a) including a solid electrolytic member (11) with electrodes (16, 17) provided on opposed surfaces of said solid electrolytic member;

a gas concentration sensor (10) for generating a current signal (I_p) responsive to a concentration of a specific component involved in a measured gas when a voltage is applied between said electrodes (16, 17) of said sensor element (10a); and

30 an application voltage control circuit (21) for feedback controlling the application voltage applied to said gas concentration sensor (10) in response to said current signal, characterized in that

an overall gain of a feedback loop including said gas concentration sensor (10) and said application voltage control circuit (21) is always equal to or smaller than 1.

8. The gas concentration sensing apparatus in accordance with any one of claims 3 to 7, wherein an application voltage line is defined on a V-I coordinate for determining the voltage applied to said gas concentration sensor, and an inclination of said application voltage line is equalized to an inclination equivalent to a D.C. resistance (R_1) of the sensor element of said gas concentration sensor in a sensor activated condition.

9. The gas concentration sensing apparatus in accordance with claim 8, wherein said gas concentration sensing apparatus is incorporated in an air-fuel ratio control system for performing a lean burn control of an internal combustion engine.

10. The gas concentration sensing apparatus in accordance with any one of claims 1 to 9, wherein a plurality of application voltage lines (L_c , L_d) different in their inclinations are provided on the V-I coordinate to selectively or continuously use said plurality of application voltage lines in accordance with the temperature of the sensor element (10).

FIG. 1

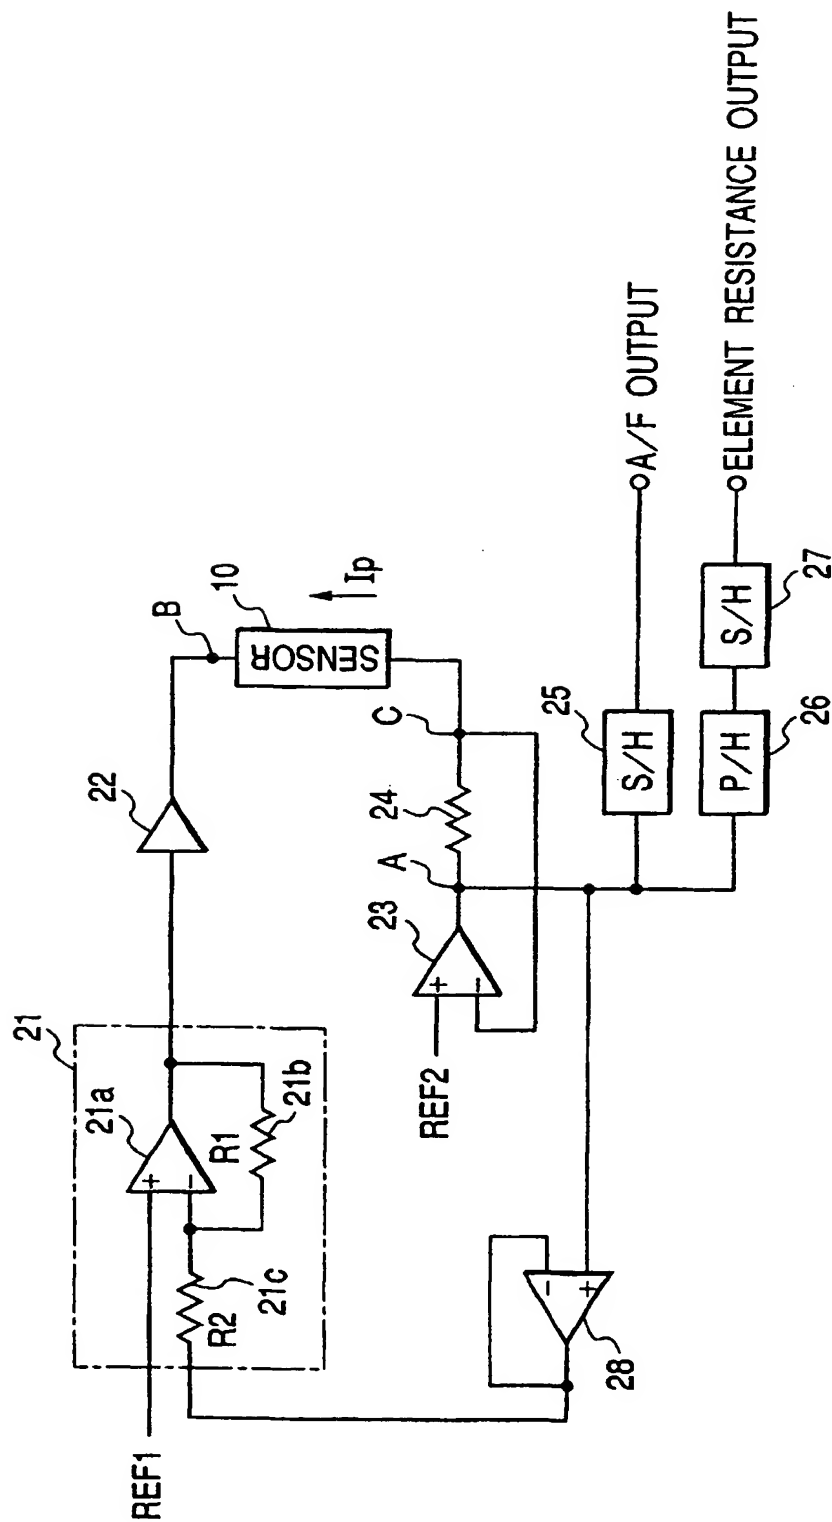


FIG. 2

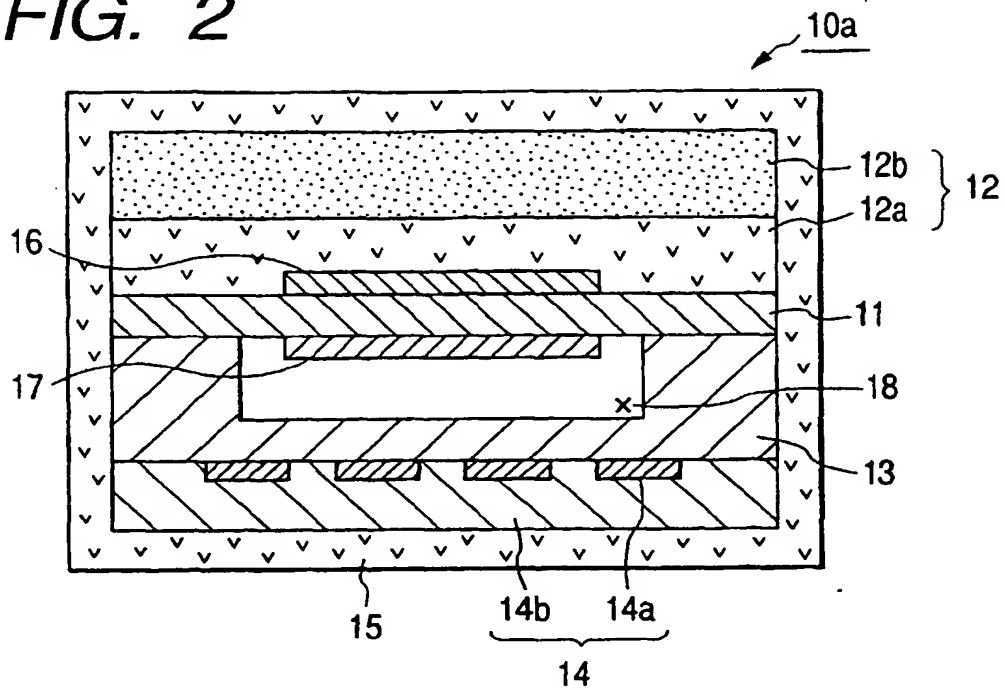


FIG. 3

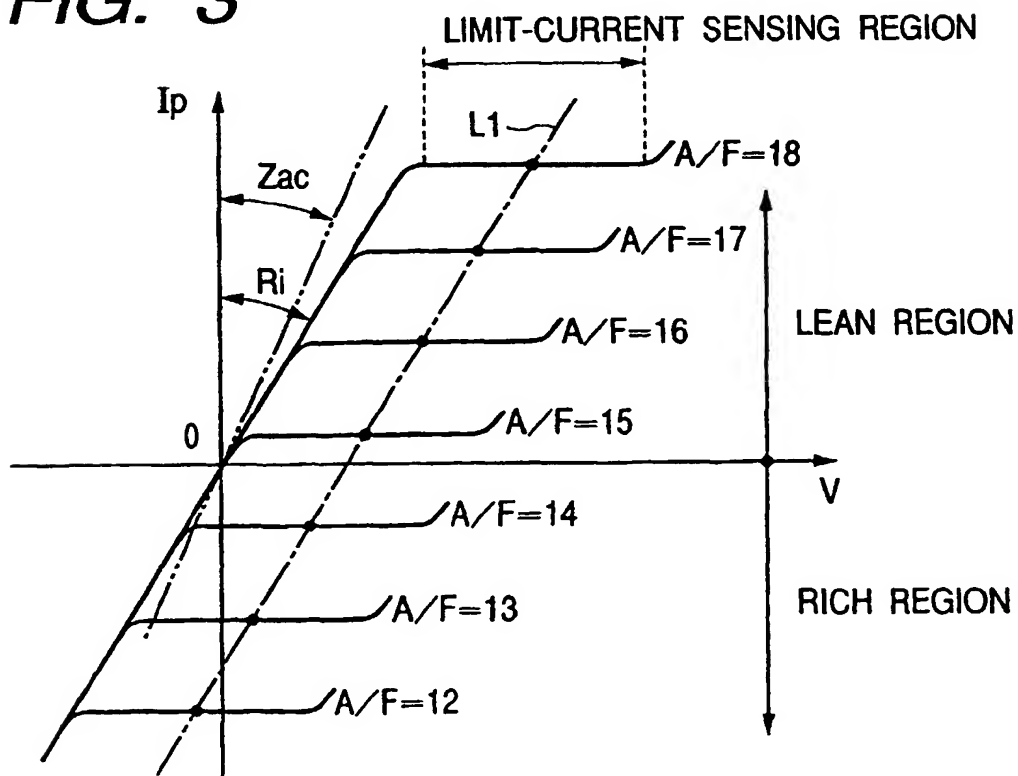


FIG. 4

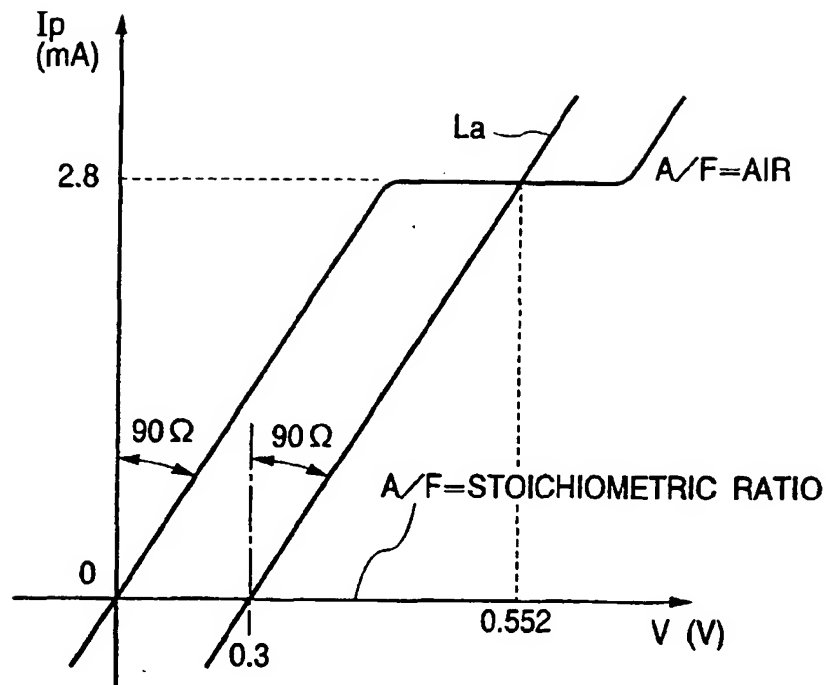


FIG. 5

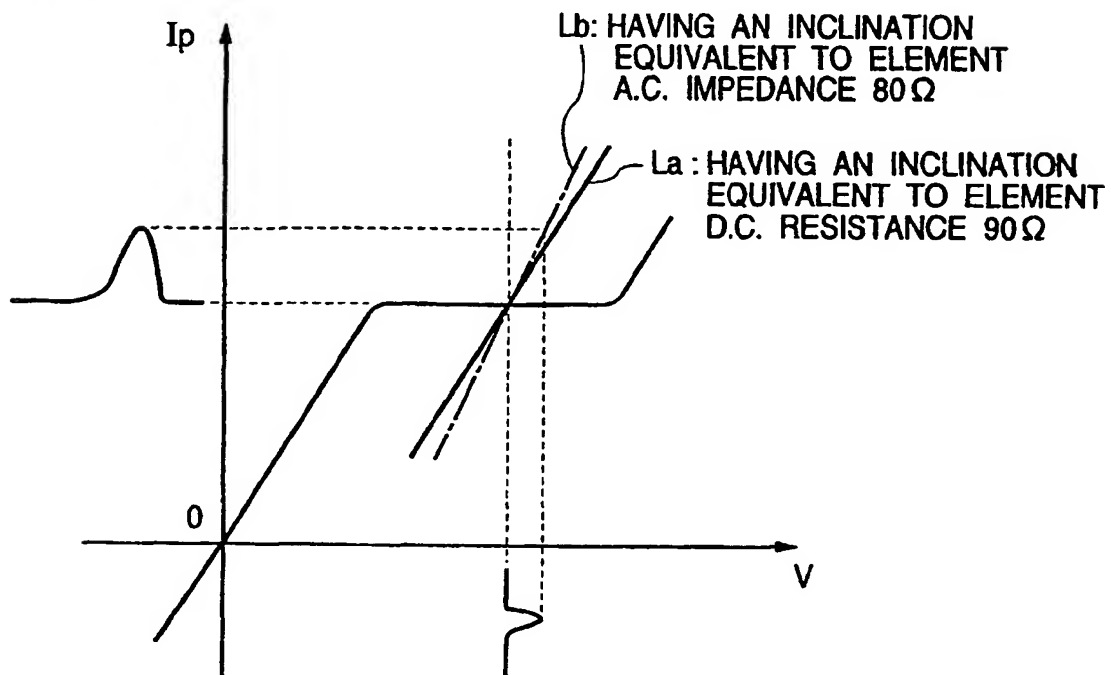


FIG. 6

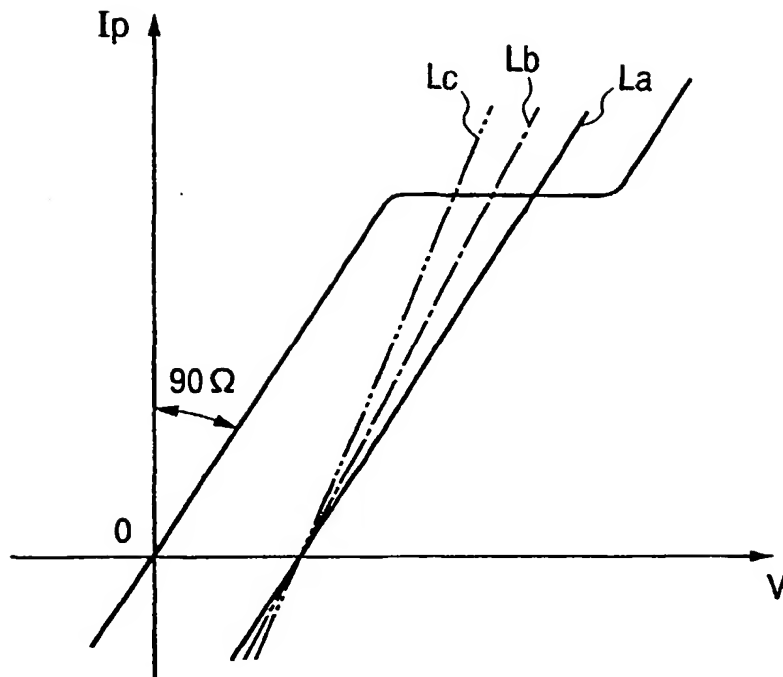


FIG. 7

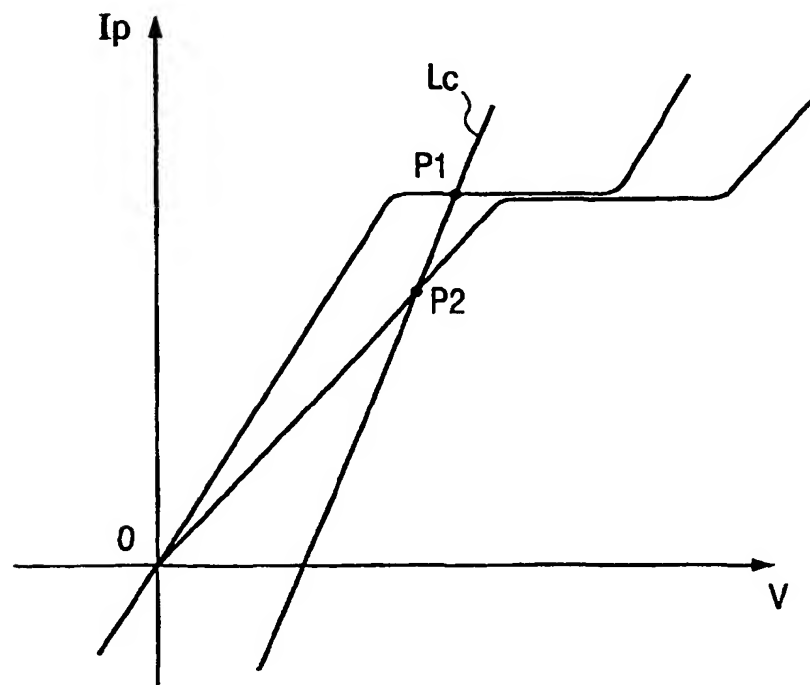


FIG. 8

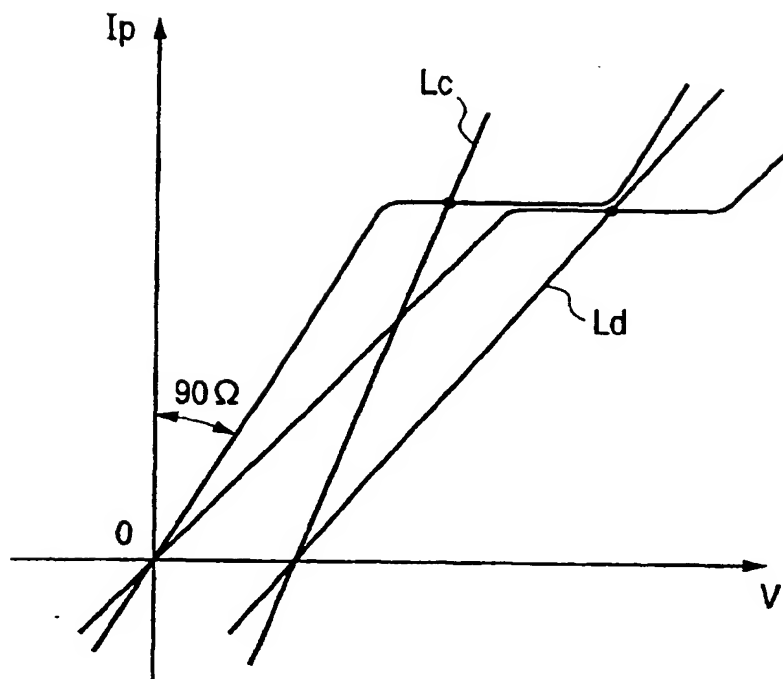


FIG. 9

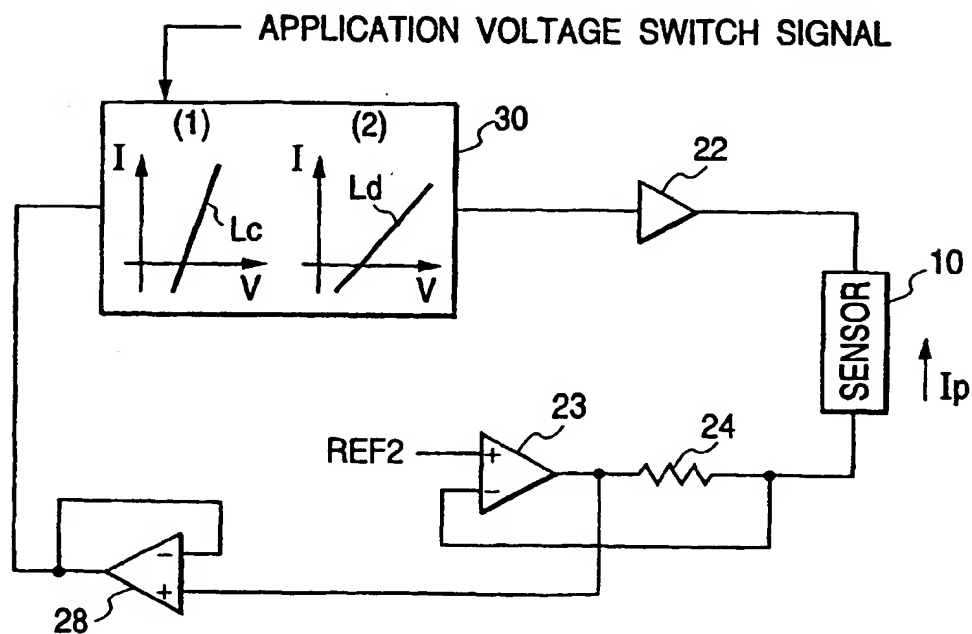


FIG. 10

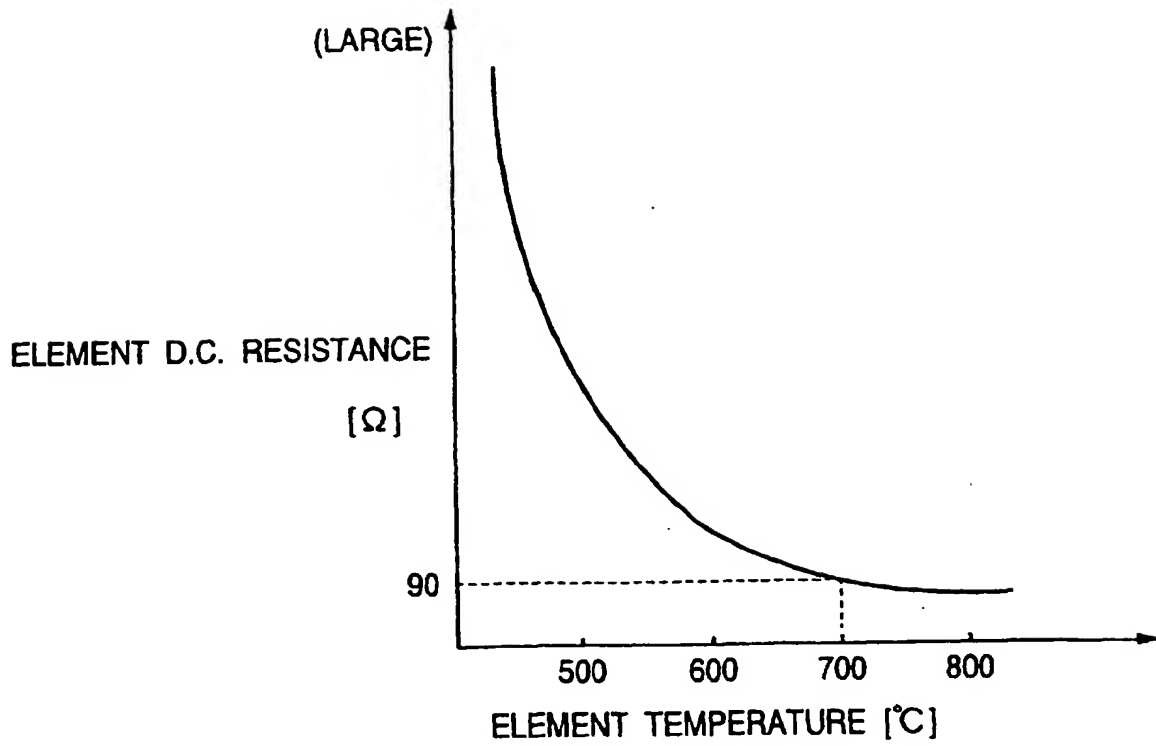


FIG. 11

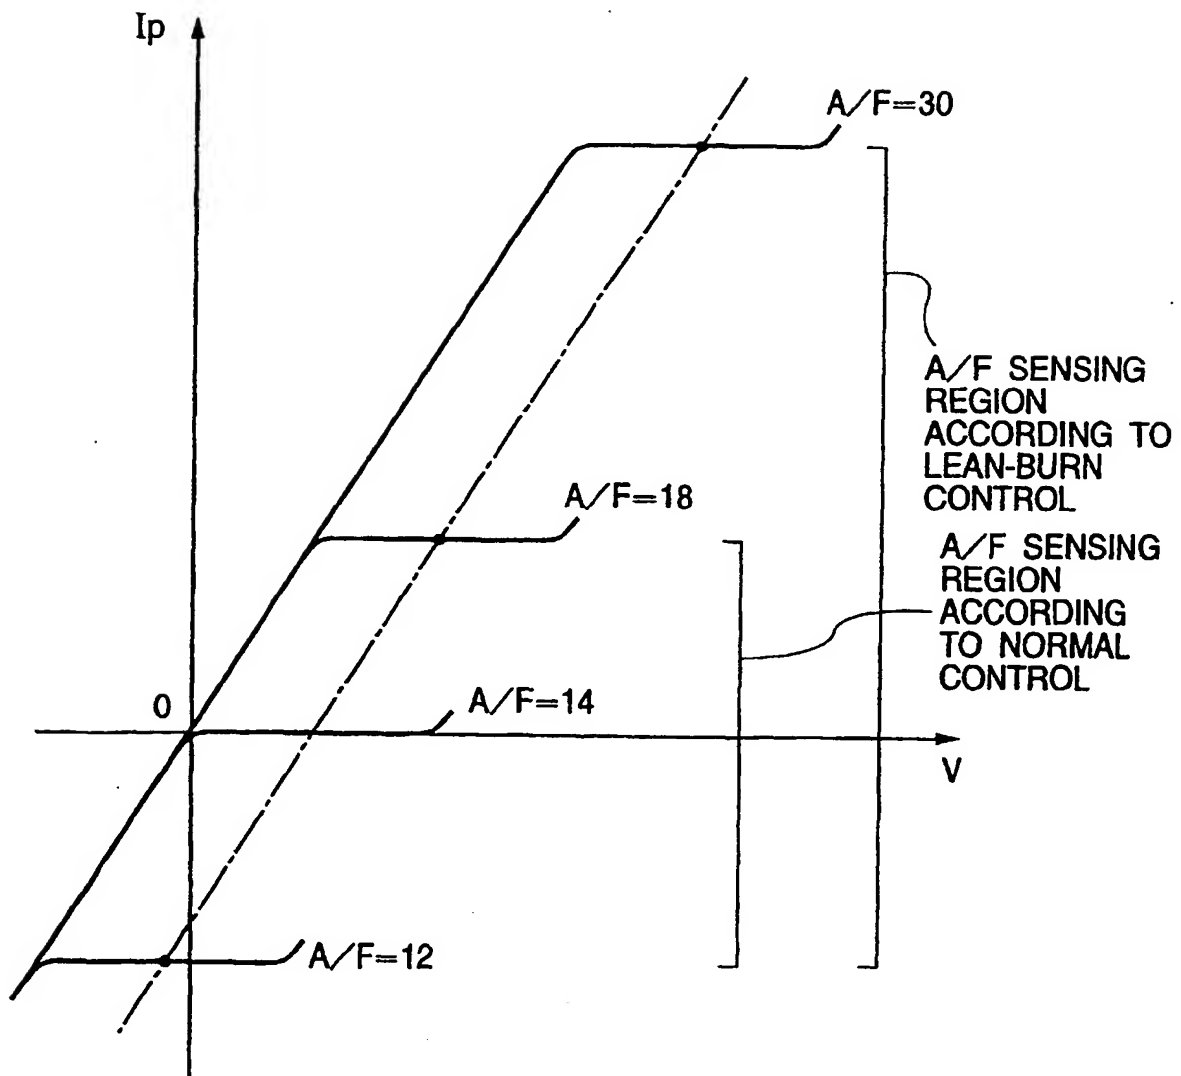


FIG. 12

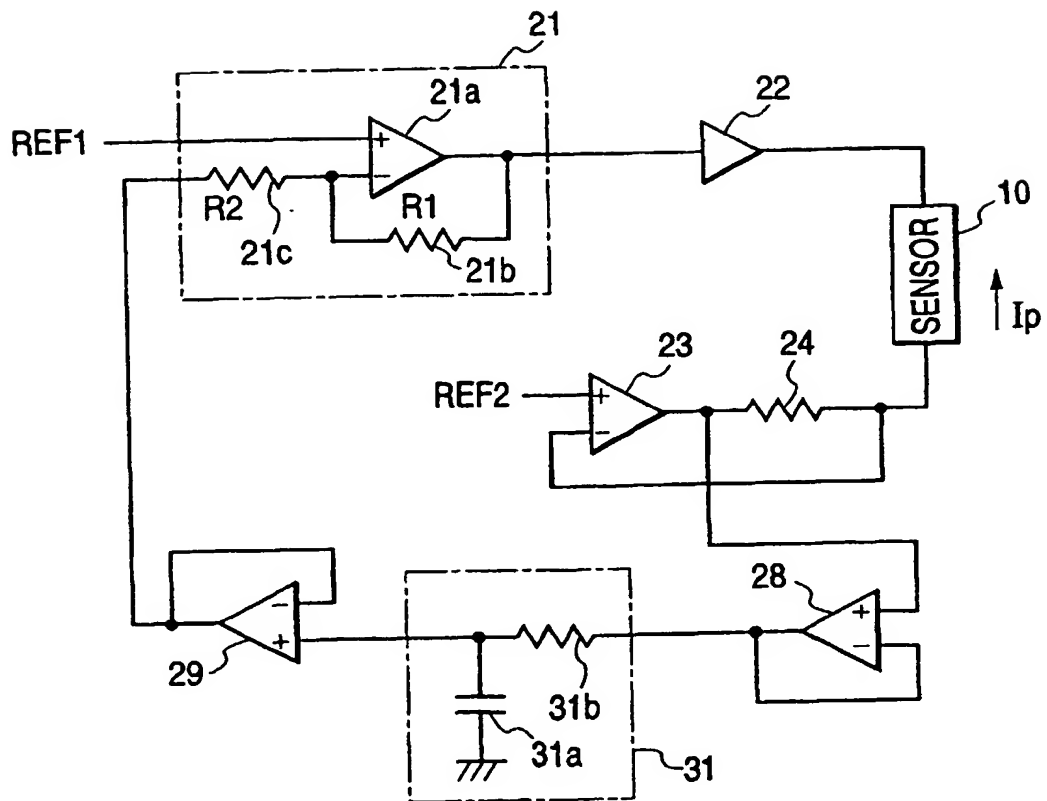


FIG. 13A

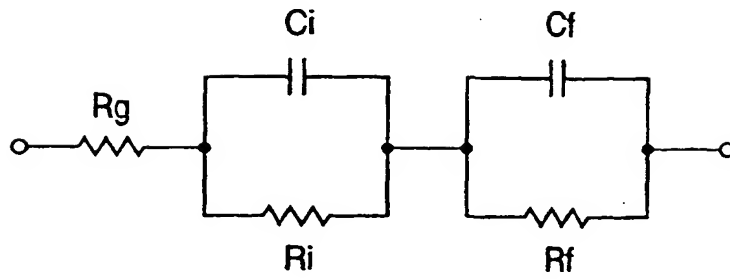


FIG. 13B

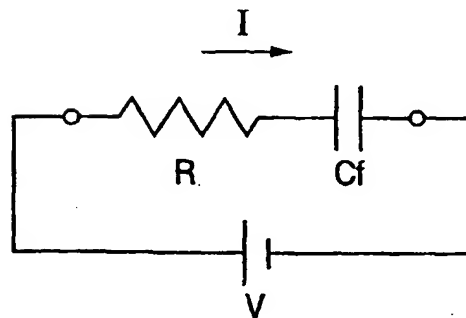


FIG. 13C



FIG. 14A

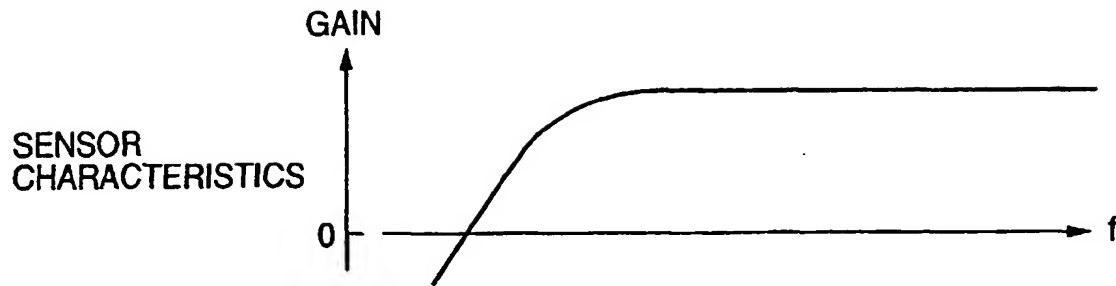


FIG. 14B

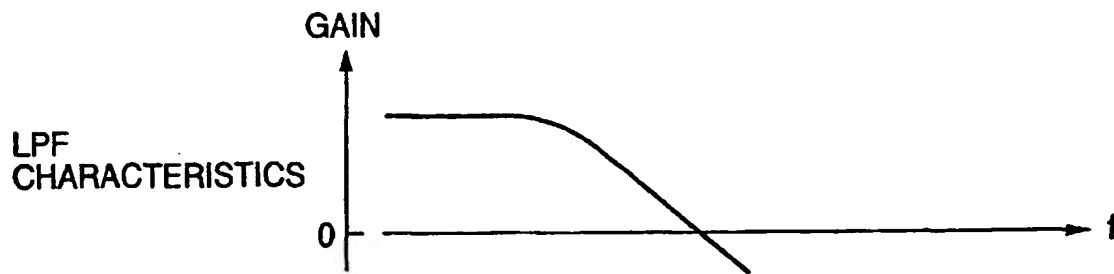


FIG. 14C

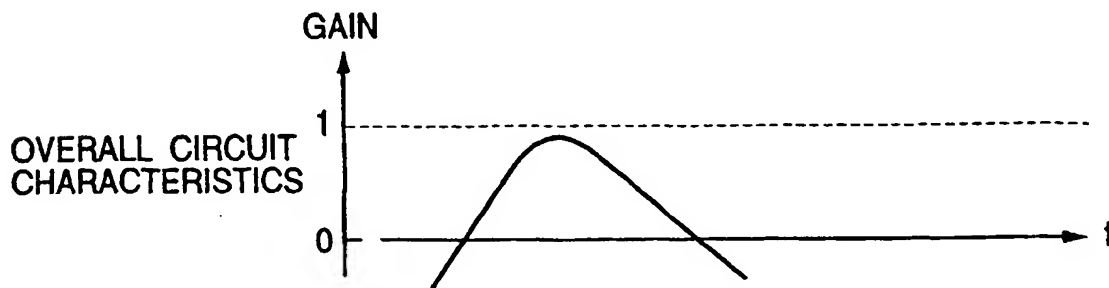


FIG. 15A


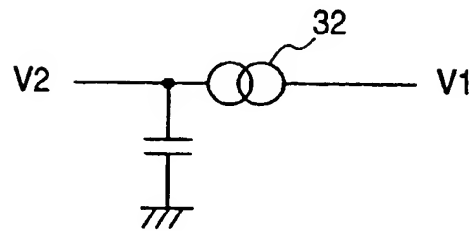


FIG. 15B

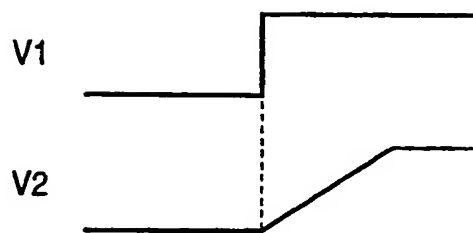

**FIG. 16
PRIOR ART**

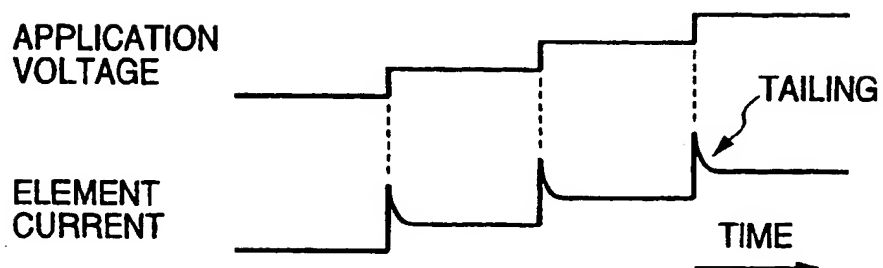


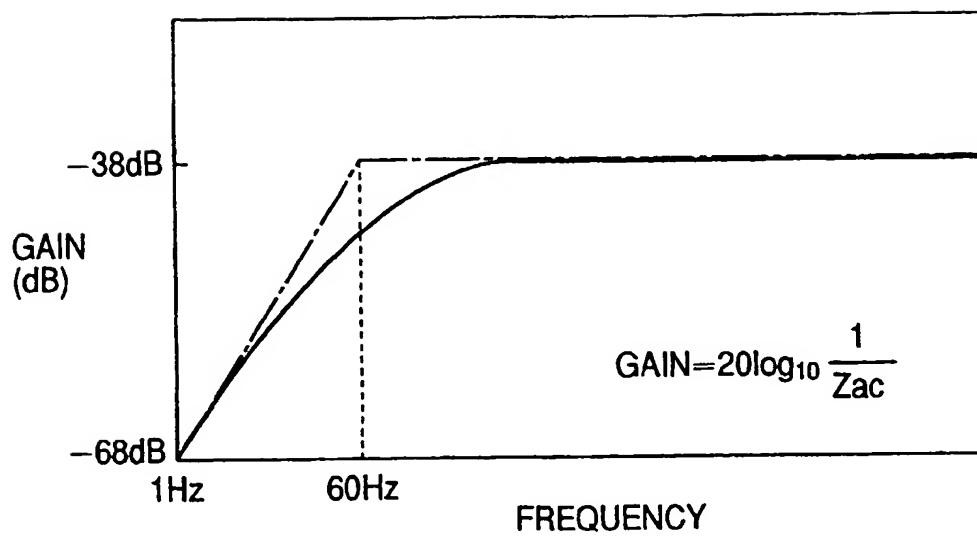
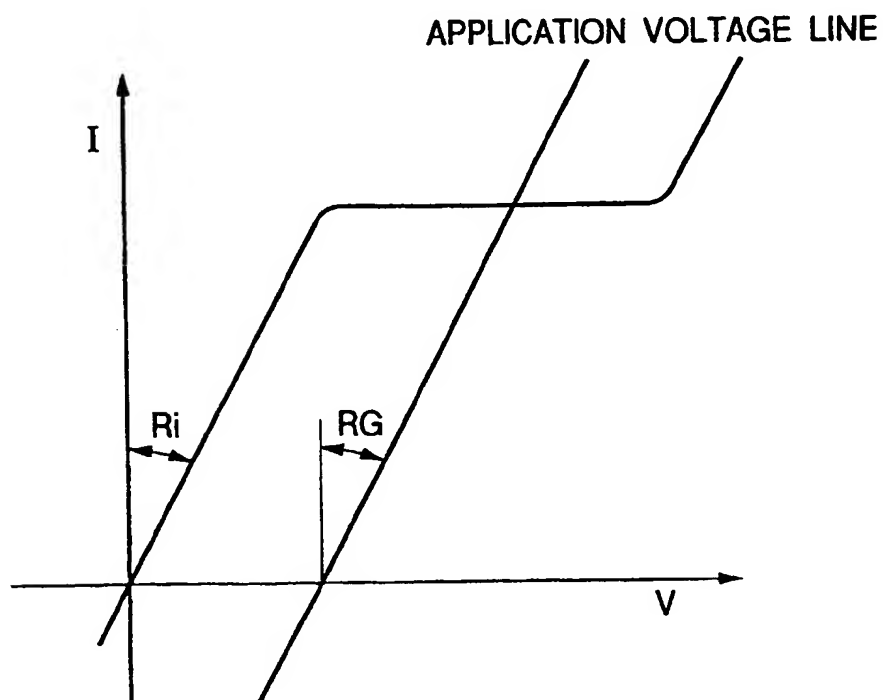
FIG. 17**FIG. 18**

FIG. 19

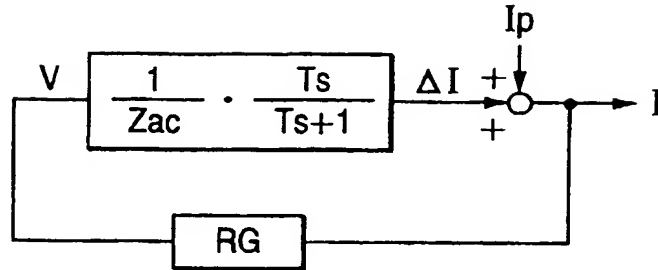


FIG. 20A

APPLICATION VOLTAGE



FIG. 20B

ELEMENT CURRENT

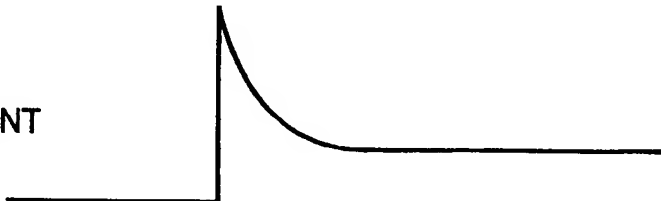


FIG. 20C

INTER-TERMINAL
RESISTANCE

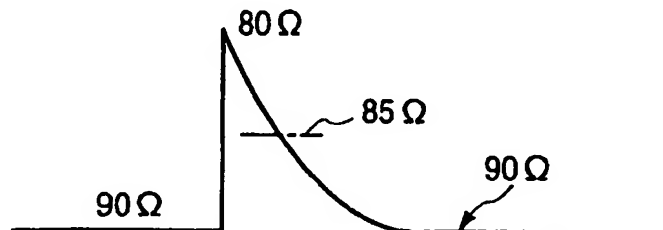


FIG. 21A

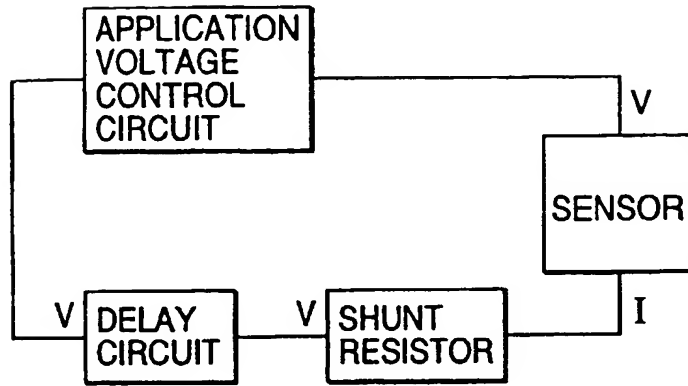


FIG. 21B



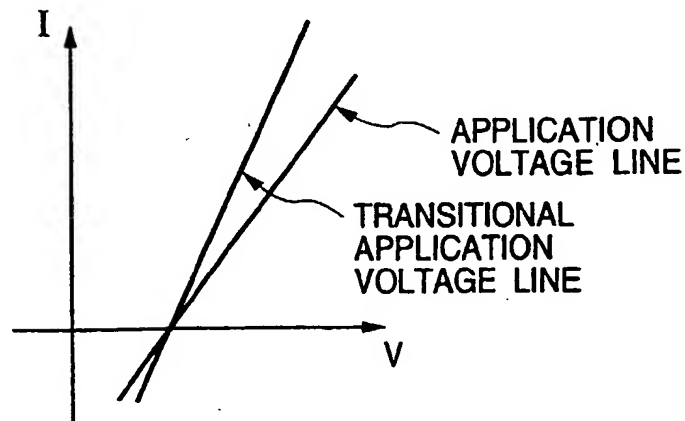


FIG. 22

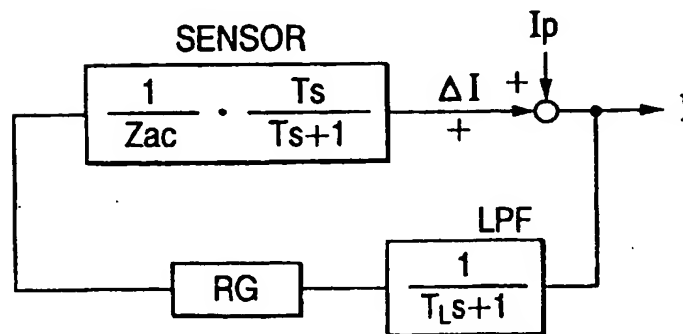

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 984 275 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
08.01.2003 Bulletin 2003/02

(51) Int Cl.7: **G01N 27/407, F02D 41/14**

(43) Date of publication A2:
08.03.2000 Bulletin 2000/10

(21) Application number: 99116051.6

(22) Date of filing: 16.08.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

- Kurokawa, Eiichi
Kariya-shi, Aichi-pref. 448-0029 (JP)
- Hada, Satoshi
Kariya-shi, Aichi-pref. 448-0029 (JP)
- Kawase, Tomoo
Kariya-shi, Aichi-pref. 448-0029 (JP)

(30) Priority: 04.09.1998 JP 25128598

(71) Applicant: **Denso Corporation**
Kariya-city, Aichi-pref., 448-0029 (JP)

(74) Representative:
Pellmann, Hans-Bernd, Dipl.-Ing. et al
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4-6
80336 München (DE)


(72) Inventors:
• Suzuki, Toshiyuki
Kariya-shi, Aichi-pref. 448-0029 (JP)

(54) Gas concentration sensing apparatus capable of suppressing sensor voltage oscillation

(57) A limit-current type A/F sensor (10) produces element current responsive to oxygen concentration in the exhaust gas when a voltage is applied to its sensor element portion. An application voltage control circuit (21) comprises an operational amplifier (21a) and resistors (21b, 21c). An output of the control circuit (21) is applied to one terminal of the A/F sensor (10) via a driver circuit (22). The other terminal of the A/F sensor (10) is connected to an output terminal of an operational am-

plifier (23) via a current-detecting resistor (24). The element current value, detected by the current-detecting resistor (24), is returned to the application voltage control circuit (21) via a buffer (28). In the application voltage control circuit (21), adjustment of the gain is performed in such a manner that the inclination of the application voltage line on the V-I coordinate becomes larger than the inclination equivalent to the A.C. impedance of the sensor element in the sensor activated condition.

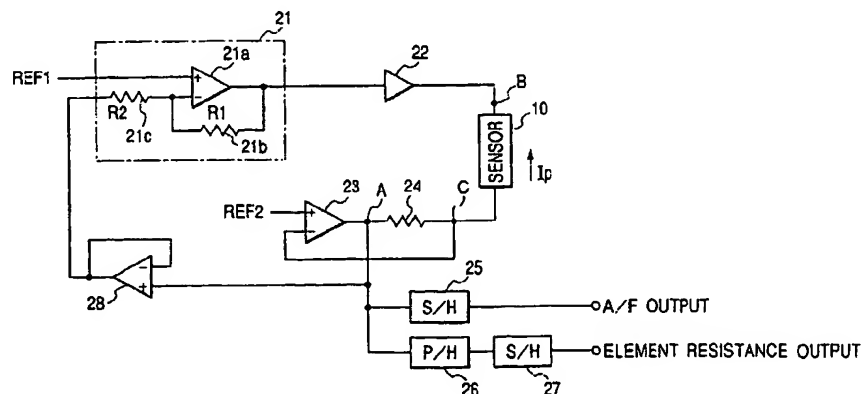FIG. 1



EP 0 984 275 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 11 6051

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 851 108 A (DENSO CORP) 1 July 1998 (1998-07-01) * the whole document *	1-10	G01N27/407 F02D41/14
D	& JP 10 185861 A 14 July 1998 (1998-07-14) ---		
A	GB 2 310 725 A (DENSO CORP) 3 September 1997 (1997-09-03) * page 18, line 11 - page 21, line 4; figure 1 *	5	
X	DE 197 44 439 A (DENSO CORP) 9 April 1998 (1998-04-09) * the whole document *	1-10	
A	DE 197 28 466 A (DENSO CORP) 8 January 1998 (1998-01-08) * the whole document *	1-10	
A	EP 0 190 750 A (HITACHI LTD) 13 August 1986 (1986-08-13) * the whole document *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
D	& JP 02 509905 A 26 June 1996 (1996-06-26) ---		
X,P	DE 198 22 801 A (DENSO CORP) 26 November 1998 (1998-11-26) * column 6, line 49 - column 8, line 68 *	1-10	G01N F02D
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 18 November 2002	Examiner Brison, O
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 6051

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0851108 A	01-07-1998	JP 10185861 A	14-07-1998
		EP 0851108 A2	01-07-1998
		US 5993641 A	30-11-1999
GB 2310725 A	03-09-1997	JP 9292364 A	11-11-1997
		DE 19708011 A1	11-09-1997
		US 6084418 A	04-07-2000
DE 19744439 A	09-04-1998	JP 10111271 A	28-04-1998
		DE 19744439 A1	09-04-1998
		GB 2318186 A ,B	15-04-1998
		US 5935400 A	10-08-1999
DE 19728466 A	08-01-1998	JP 10019827 A	23-01-1998
		JP 10082760 A	31-03-1998
		DE 19728466 A1	08-01-1998
		US 6055972 A	02-05-2000
EP 0190750 A	13-08-1986	JP 2509905 B2	26-06-1996
		JP 61180131 A	12-08-1986
		CN 86101269 A ,B	12-11-1986
		DE 3685126 D1	11-06-1992
		EP 0190750 A1	13-08-1986
		KR 9204816 B1	18-06-1992
DE 19822801 A	26-11-1998	JP 11037971 A	12-02-1999
		DE 19822801 A1	26-11-1998
		GB 2327270 A ,B	20-01-1999
		US 5980710 A	09-11-1999
		US 6226861 B1	08-05-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)